

A Patent

236/205 (6646-101NL)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Anticipated Classification of this application:

Class _____ Subclass _____

Prior application: 08/475,425

Examiner: Woo, Stella

Art Unit: 2743

Jc135 U.S. PTO
09/270241
03/15/99

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

FILING UNDER 37 CFR 1.53(B)

This is a request for filing for a

☒ continuation ☐ divisional

application under 37 C.F.R. 1.53(b) of pending prior application Serial No. 08/475,425, filed on June 7, 1995, which is a divisional of application Serial No. 07/335,923, filed on April 10, 1989, which is a continuation of application Serial No. 07/194,258, now U.S. Patent No. 4,845,739, which is a continuation-in-part of application Serial No. 07/018,244, now U.S. Patent No. 4,792,968, which is a continuation-in-part of application Serial No. 06/753,299, now abandoned, of

Ronald A. Katz

for: TELEPHONIC-INTERFACE STATISTICAL ANALYSIS SYSTEM

1. COPY OF PRIOR APPLICATION AS FILED WHICH IS ATTACHED

☒ I hereby verify that the attached papers are a true and complete copy of what is shown in my records to be the above-identified prior application, including the oath or declaration as originally filed. (37 CFR 1.53)

CERTIFICATE OF MAILING (37 C.F.R. §1.10)

I hereby certify that this paper (along with any referred to as being attached or enclosed) is being deposited with the United States Postal Service on the date shown below with sufficient postage as 'Express Mail Post Office To Addressee' (Label No. EM 350827177US) in an envelope addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

March 15, 1999

Date of Deposit

Reena Kuyper
Reena Kuyper, Registration No. 33,830

45 Pages of Specification
17 Pages of Claims
1 Pages of Abstract
6 Sheets of Drawings formal X Informal
1 Page of Declaration, Power of Attorney, and Petition to the
principal attorney
1 Page of Associate Power of Attorney from principal attorney
2 Pages of Power of Attorney by Assignee
2 Pages of subsequent Revocation and Grant of Power of Attorney

- ☒ In accordance with the indication required by 37 CFR 1.53(b), my records reflect that the original signed declaration showing applicant's signature was filed on May 4, 1988.
- ☐ The amendment referred to in the declaration filed to complete the prior application, and I hereby state, in accordance with the requirements of 37 CFR 1.53(b), that this amendment did not introduce new matter therein.

2. AMENDMENTS

- ☒ Cancel in this application original Claims 2-28 of the prior application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
- ☒ A Preliminary Amendment is enclosed. (Claims added by Amendment must be numbered consecutively beginning with the number next following the highest numbered original claim in the prior application.)

3. INFORMATION DISCLOSURE STATEMENT

- ☐ An Information Disclosure Statement, PTO 1449, and references are submitted herewith.

4. PETITION FOR SUSPENSION OF PROSECUTION FOR THE TIME TO FILE AN AMENDMENT

- ☐ There is provided herewith a PETITION FOR SUSPENSION OF PROSECUTION FOR THE TIME NECESSARY TO FILE AN AMENDMENT (NEW APPLICATION FILED CONCURRENTLY).

5. FEE CALCULATION (including claims presented in Preliminary Amendment)

BASIC FILING FEE:				\$760.00
Total Claims	10	- 20	= 0 x \$18	\$0.00
Independent Claims	3	- 3	= 0 x \$78	\$0.00
Multiple Dependent Claims				\$260 (if applicable)
Surcharge 37 CFR 1.16(e)				\$130 (if applicable)
TOTAL OF ABOVE CALCULATIONS				\$ 760.00
Reduction by ½ for Filing by Small Entity. Note 37 CFR 1.9, 1.27, 1.28. If applicable, Verified Statement must be attached.				
Misc. Filing Fees (Recordation of Assignment)				
TOTAL FEES SUBMITTED HERewith				\$760.00

☐ The fee for extra claims is not being paid at this time.

Filing Fee Calculation

6. SMALL ENTITY STATUS

- ☐ A Verified Statement to establish small entity under 37 CFR 1.9 and 1.27 is attached
- ☐ has been filed in the prior application and such status is still proper and desired. [37 CFR 1.28(a)]

Filing Fee Calculation (50% of above) \$0.00

7. DRAWINGS

[NOTE: DO NOT CHECK THIS IF PRIOR CASE IS NOT TO BE ABANDONED.]

- ☐ Transfer the drawings from the prior application to this application and, subject to Item 16 below, abandon said prior application as of the filing date accorded to this application. A duplicate copy of this request is enclosed for filing in the prior application file.
[May only be used if signed by (1) applicant, (2) assignee of record or (3) attorney or agent of record authorized by 37 CFR 1.138 and before payment of issue fee.]

- ☐ Transfer the following sheet(s) of drawings from the prior application to this application.

☒ New drawings are enclosed ☐ formal ☒ informal

8. **PRIORITY - 35 U.S.C. 119**

- ☐ Priority of application Serial No. _____ filed on _____ in _____ [country] is claimed under 35 U.S.C. 119.
- ☐ The certified copy has been filed in prior U.S. application Serial No. _____ on _____.
- ☐ The certified copy will follow.

9. **RELATE BACK - 35 U.S.C. 120**

- ☒ Amend the Specification by deleting on page 1, lines 2-8, and inserting under the heading "Background and Summary of the Invention" as follows:
—This application is a continuation of Application Serial No. 08/475,425, filed on June 7, 1995, and entitled "Telephonic-Interface Statistical Analysis System," which is a divisional of Application Serial No. 07/335,923, filed on April 10, 1989, and entitled "Telephonic-Interface Statistical Analysis System," which is a continuation of Application Serial No. 07/194,258, filed on May 16, 1988, and entitled "Telephonic-Interface Statistical Analysis System," now U.S. Patent No. 4,845,739, which is a continuation-in-part of Application Serial No. 07/018,244, filed on February 24, 1987, and entitled "Statistical Analysis System For Use With Public Communication Facility," now U.S. Patent No. 4,792,968, which is a continuation-in-part of Application Serial No. 06/753,299, filed on July 10, 1985, and entitled "Statistical Analysis System For Use With Public Communication Facility," now abandoned.—

10. **INVENTORSHIP STATEMENT**

- ☒ With respect to the prior co-pending U.S. application from which this application claims benefit under 35 U.S.C. 120, the inventor(s) in this application is (are):
- ☒ the same
- ☐ less than those named in the prior application and it is requested that the following inventor(s) identified above for the prior application be deleted:
- [type name(s) of inventor(s) to be deleted]
- ☒ The inventorship for all the claims in this application are:
- ☒ the same
- ☐ not the same, and an explanation, including the ownership of the various claims at the time the last claimed invention was made, is submitted.

11. ASSIGNMENT

- ☒ The prior application is assigned of record to Ronald A. Katz Technology Licensing, L.P.

Ronald A. Katz Technology Licensing, L.P.
Name of Assignee

9200 Sunset Boulevard, Suite 1005, Los Angeles, California 90069
Address of Assignee

Title of person authorized to sign on behalf of assignee

Assignment recorded in PTO on September 26, 1994, Reel 7133, Frames 090-100

- ☐ An Assignment of the invention to _____ is attached.

12. FEE PAYMENT BEING MADE AT THIS TIME

- ☐ Not attached. No filing fee is submitted. [This and the surcharge required by 37 CFR 1.16(e) can be paid subsequently.]

- ☒ Attached.

☒ Filing fee. \$760.00

☐ Recording assignment. [~~\$40.00~~ 37 CFR 1.21(h)(1)]
Petition fee for filing by other than all the inventors or
person on behalf of the inventor where inventor refused
to sign or cannot be reached.
[~~\$130.00~~; 37 CFR 1.47 and 1.17(h)]

☐ Petition fee to Suspend Prosecution for the Time
Necessary to File an Amendment (New Application Filed
Concurrently.
[~~\$130.00~~; 37 CFR 1.103 and 1.17(i)(1)]

☐ For processing an application with a specification
in a non-English language.
[~~\$130.00~~; 37 CFR 1.52(d) and 1.17(k)]

☐ Processing and retention fee.
[~~\$130.00~~; 37 CFR 1.53(d) and 1.21(l)]

Total Fees Enclosed \$760.00

13. METHOD OF PAYMENT OF FEES

- ☒ Attached is a check in the amount of \$760.00.
- ☐ Charge Deposit Account No. **12-2475** in the amount of \$0.00.

14. AUTHORIZATION TO CHARGE ADDITIONAL FEES

The Commissioner is hereby authorized to charge the following additional fees by this paper and during the entire pendency of this application to Deposit Account No. **12-2475**:

- ☒ 37 CFR 1.16 (filing fees)
- ☒ 37 CFR 1.16 (presentation of extra claims)
- ☒ 37 CFR 1.16(e) (surcharge for filing the basic filing fee and/or declaration on a date later than the filing date of the application)
- ☐ 37 CFR 1.17 (application processing fees)
- ☐ 37 CFR 1.18 (issue fee at or before mailing of Notice of Allowance, pursuant to 37 CFR 1.311(b))

15. INSTRUCTIONS AS TO OVERPAYMENT

- ☒ Credit Deposit Account No. **12-2475**.
- ☐ Refund

16. POWER OF ATTORNEY

- ☐ The power of attorney in the prior application is to
- ☒ The power of attorney in the prior application is to the registered attorneys listed below and members of or associates in the law firm of **LYON & LYON LLP**, 633 West Fifth Street, 47th Floor, Los Angeles, California 90071, Registration No. 11,611, whose members are registered to practice in the U.S. Patent and Trademark office:

Roland N. Smoot, Reg. No. 18,718
Conrad R. Solum, Jr., Reg. No. 20,467
James W. Geriak, Reg. No. 20,233
Robert M. Taylor, Jr., Reg. No. 19,848
Samuel B. Stone, Reg. No. 19,297
Douglas E. Olson, Reg. No. 22,798
Robert E. Lyon, Reg. No. 24,171
Robert C. Weiss, Reg. No. 24,939
Richard E. Lyon, Jr., Reg. No. 26,300
John D. McConaghy, Reg. No. 26,733
William C. Steffin, Reg. No. 26,811
Coe A. Bloomberg, Reg. No. 26,605
J. Donald McCarthy, Reg. No. 25,119
John M. Benassi, Reg. No. 27,483
James J. Shalek, Reg. No. 29,749
Allan W. Jansen, Reg. No. 29,035
Robert W. Dickerson, Reg. No. 29,914
Roy L. Anderson, Reg. No. 30,240
David B. Murphy, Reg. No. 31,125

James C. Brooks, Reg. No. 29,898
Jeffrey M. Olson, Reg. No. 30,790
Steven D. Hemminger, Reg. No. 30,755
Jerrold B. Reilly, Reg. No. 32,293
Paul H. Meier, Reg. No. 32,274
John A. Rafter, Jr., Reg. No. 31,653
Kenneth H. Ohriner, Reg. No. 31, 646
Mary S. Consalvi, Reg. No. 32,212
Lois M. Kwasigroch, Reg. No. 35,579
Lawrence R. LaPorte, Reg. No. 38,948
Robert C. Laurenson, Reg. No. 34,206
Carol A. Schneider, Reg. No. 34,923
Hope E. Melville, Reg. No. 34,874
Michael J. Wise, Reg. No. 34,047
Richard J. Warburg, Reg. No. 32,327
and
Reena Kuyper, Reg. No. 33,830

- ☒ The power appears in the original papers in the prior application.
- ☐ The power does not appear in the original papers, but was filed on _____ in this application.
- ☐ A new power has been executed and is attached.
- ☒ Address all future communications to:

LYON & LYON LLP
633 West Fifth Street, 47th Floor
Los Angeles, California 90071
(213) 489-1600
Attention: Reena Kuyper

17. MAINTENANCE OF CO-PENDENCY OF PRIOR APPLICATION

- ☐ A petition, fee and response has been filed to extend the term in the pending **prior** application until _____. A copy of the petition for extension of time in the **prior** application is attached.

18. CONDITIONAL PETITIONS FOR EXTENSION OF TIME IN PRIOR APPLICATION


- ☐ A conditional petition for extension of time is being filed in the pending **prior** application. A copy of the conditional petition for extension of time in the **prior** application is attached.

19. **ABANDONMENT OF PRIOR APPLICATION**

- ☐ Please abandon the prior application at a time while the prior application is pending or when the petition for extension of time or to revive in that application is granted and when this application is granted a filing date so as to make this application co-pending with said prior application. At the same time, please add the words "now abandoned" to the amendment of the specification set forth in Item 13 above.

Respectfully submitted,

LYON & LYON LLP



By: _____

Reena Kuyper
Registration No. 33,830
Attorneys for Applicants

Dated: March 15, 1999 _____

633 West Fifth Street, Suite 4700
Los Angeles, California 90071-2066
(213) 489-1600

Enclosures

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants:

Ronald A. KATZ

Serial No. Not Yet Assigned

Filed: Herewith

For: TELEPHONIC-INTERFACE
STATISTICAL ANALYSIS SYSTEM

) Group Art Unit [Parent Case]: 2743
)
)

) Examiner [Parent Case]: Woo, Stella
)
)

PRELIMINARY AMENDMENT

Box Patent Application
Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to examination, please amend the above-identified application as follows:

IN THE CLAIMS:


Please add claims 29-38 as follows and cancel claim 1, without prejudice.

29. A control system for use with a communication facility including remote terminals for individual callers, wherein each of said remote terminals comprises a telephonic instrument including a voice communication device, and a digital input device in the form of an array of alphabetic numeric buttons for providing caller data signals, said control system comprising:

CERTIFICATE OF MAILING UNDER 37 CFR 1.10

I hereby certify that this document (along with any referred to as being attached or enclosed) is being deposited with the United States Postal Service on the date shown below with sufficient postage as Express Mail (Label No. EM350827177US) in an envelope addressed to the Assistant Commissioner for Patents, Washington, D.C., 20231.

Date: March 15, 1999


Reena Kuyper, Registration No. 33,830

a processor unit for processing said caller data signals supplied by individual callers actuating said remote terminals;

interface structure for interfacing said communication facility to said processor unit wherein said interface structure receives data signals prior to the close of communication with the caller, including called number data signals (DNIS) and calling number identification data signals automatically provided by said communication facility and said caller data signals developed by said remote terminals;

voice generator for providing prompts to said individual callers in response to which said individual callers provide said caller data signals, said caller data signals including caller qualification data for qualifying callers; and

means for controlling said processor unit in accordance with said called number identification data signals (DNIS) to process at least certain of said caller data signals in accordance with a select format from a plurality of formats identified by said called number identification data signals (DNIS).

30. A control system according to claim 29, wherein at least certain of said individual callers at certain of said remote terminals are also subject to qualification based on said calling number identification data signals.

31. An analysis control system for controlling order of items for use with a communication facility including remote terminals for individual callers, wherein each of said remote terminals comprises a telephonic instrument including a voice communication device and a digital input device in the form of an array of alphabetic numeric buttons for providing data and wherein said communication facility has a capability to automatically provide terminal digital data, indicating a calling number, said analysis control system comprising:

interface structure coupled to said communication facility to interface said remote terminals for voice and digital communication and including means to provide caller data signals representative of data relating to said individual callers provided from said remote terminals prior to the close of communication with the caller, including caller social

security number identification data and said terminal digital data indicative of a calling telephone number;

record testing structure connected to receive and test said caller data signals indicative of said terminal digital data representative of a calling telephone number and said caller social security number identification data against previously stored terminal digital data and caller social security number identification data; and

analysis structure for receiving and processing said caller data signals including item number data for ordering particular items under control of said record testing structure.

32. An analysis control system according to claim 31, wherein a caller further provides credit card number data.

33. An analysis control system according to claim 32, wherein said caller further provides expiration data with respect to said credit card number data.

34. An analysis control system according to claim 33, wherein said caller receives authorization on-line.

35. An analysis control system for use with a communication facility including remote terminals for individual callers, wherein each of said remote terminals comprises a telephonic instrument including a voice communication device and digital input device in the form of an array of alphabetic numeric buttons for providing data and wherein said communication facility has a capability to automatically provide terminal digital data, indicating a calling telephone number, said analysis control system comprising:

interface structure coupled to said communication facility to interface said remote terminals for voice and digital communication and including means to provide caller data signals representative of data relating to said individual callers provided from said remote terminals prior to the close of communication with the caller, including caller personal identification data and said terminal digital data indicative of a calling telephone number;

record testing structure connected to receive and test said caller data signals indicative of said terminal digital data representative of said calling telephone number and said caller personal identification data against previously stored terminal digital data and caller personal identification data;

storage structure for storing certain of said data provided by said individual callers including item number data for ordering particular items; and

analysis structure for receiving and processing said caller data signals under control of said record testing structure.

36. An analysis control structure according to claim 35 wherein said callers further provide credit card number data as further identification.

37. An analysis control system according to claim 36, wherein said individual callers further provide expiration data with respect to said credit card number data.

38. An analysis control system according to claim 37, wherein said individual callers receive authorization on-line.


REMARKS

By this preliminary amendment, applicant is canceling claim 1, without prejudice, and introducing claims 29-38 for the Examiner's consideration. Applicant respectfully requests continued consideration of claims 29-38, which were originally pursued in application Serial No. 08/475,425.

Respectfully submitted,

LYON & LYON LLP

By:


Reena Kuyper
Registration No. 33,830

Dated: March 15, 1999_____

633 West Fifth Street, Suite 4700
Los Angeles, California 90071-2066
(213) 489-1600

TELEPHONIC-INTERFACE STATISTICAL ANALYSIS SYSTEM

Background and Summary of the Invention

This is a continuation-in-part of Application
Serial No. 018,244 filed February 24, 1987, and
entitled "Statistical Analysis System For Use With
5 Public Communication Facility" which was a continua-
tion-in-part of Application Serial No. 753,299 filed
July 10, 1985 and entitled "Statistical Analysis System
For Use With Public Communication Facility".

Various forms of publicly accessible commu-
10 nication systems for providing access to a central
station have been proposed, some involving telecom-
munications. However, sometimes a need for ancillary
functions arise in that regard, e.g. it may be desi-
rable to positively identify a large group of persons,
15 as a demographically controlled group, or a specifi-
cally entitled group, then statistically analyze data
from the group so as to accurately identify certain
persons in the group and select a subset of at least
one person. Specifically, it may be desirable to
20 obtain medical data from an entitled group of people,
to correlate such data, perhaps introduce external
data, then identify a select subset of the group. In
that regard, a need exists for an improved, effective,
economical, and expedient system of telecommunication

incorporating means for performing qualification, identification, analysis and selection of individual persons.

It has been proposed to interface persons at telephone calling stations directly with a computer facility. In accordance with such arrangements, recorded voice messages prompt callers to provide data by actuating the alphanumeric buttons that are conventionally employed for dialing from one telephone station to another. In one prior arrangement, a caller may actuate dialing buttons to selectively attain a communication channel or to address specific information in a computer. In another arrangement, dialing buttons may be actuated to specify a billing designation as for requested services. Generally, such systems are believed to have been somewhat limited in scope, often involving difficulties that are frustrating or confusing to a caller. Nevertheless, such techniques have been widely used to enhance and broaden communication.

In general, the present invention comprises a telephonic-interface system and related process for selectively utilizing both analog (voice) and digital telephonic communication in a variety of different interface formats or programs, as to select or qualify a set of callers, enable positive identification of at least certain of the callers in the set, acquire data from callers in the set, statistically analyze acquired data, as in combination and in association with external data (time independent), and accordingly to isolate a subset of the callers with verifiable identification. That is, the external data (separate from caller-provided data) may be introduced at any of a variety of different times in relation to the caller data.

For example, a voice origination apparatus may prompt individual callers who (after qualification) provide select digital data to develop a record for further processing either immediately, upon the
 5 evolution of a defined set of callers or upon the establishment of select external data. Thus, following a qualification phase, the information acquisition phase may be concurrent or consecutive with respect to the processing phase. When appropriate, abort capabi-
 10 lity allows a caller to remain "off hook" and go to analog (vocal) communication. The caller then inter-
 faces directly with an operator.

The system of the present invention may qualify an entitled set of callers, then receive answer
 15 data in the course of the call and develop identifica-
 tion or designation data, sequence data and statistical data. The system may then provide data cells for storing individual data while assigning confirmable identifications to the entitled set. From the set, a
 20 subset is defined. That is, in accordance with various formats, acquired data is processed in statistical relationship, or in relation to applied external data to accomplish such functional operating formats as an auction sale, a contest, a lottery, a poll, a merchan-
 25 dising operation, a game, and so on.

A variety of memory techniques are used to selectively activate the voice origination apparatus. Accordingly, statistical analysis and selection can be effectively and economically accomplished with respect
 30 to a substantial set of callers who are accommodated individual communication through a telephone system.

Brief Description of the Drawings

In the drawings, which constitute a part of
 35 this specification, exemplary embodiments exhibiting

various objectives and features hereof are set forth, specifically:

FIGURE 1 is a block diagram of a system constructed in accordance with the present invention;

FIGURE 2 is a fragmentary diagrammatic representation of a storage cell format as may be developed in the system of FIGURE 1;

FIGURE 3 is a flow diagram of one operating format of the system of FIGURE 1;

FIGURE 4 is a block diagram of a form of processor or function unit as may be employed in the system of FIGURE 1;

FIGURE 5 is a fragmentary diagrammatic representation of a storage cell format as may be developed in the system of FIGURE 1 with the processor of FIGURE 4;

FIGURE 6 is a block diagram of elements in an operating function unit of FIGURE 4;

FIGURE 7 is a diagrammatic representation of a storage cell format as may be developed in the system of FIGURE 4; and

FIGURE 8 is a block diagram of elements in an operating function unit of FIGURE 4.

Description of the Illustrative Embodiments

As required, detailed illustrative embodiments of the present invention are disclosed herein. However, physical communication systems, data formats, and operating structures in accordance with the present invention may be embodied in a wide variety of forms, some of which may be quite different from those of the disclosed embodiments. Consequently, the specific structural and functional details disclosed herein are merely representative; yet in that regard, they are deemed to afford the best embodiments for purposes of

disclosure and to provide a basis for the claims herein which define the scope of the present invention.

Referring initially to FIGURE 1, a series of remote telephone-instrument terminals T1 through Tn are represented (left). The terminals are generally similar, and accordingly, only the terminal T1 is illustrated in detail.

In the disclosed embodiment, the remote terminals T1 through Tn represent the multitude of conventional telephone terminals that are coupled to a communication facility C which may take the form of a comprehensive public telephone system for interconnecting any associated terminals T1-Tn. In accordance with the present system, the terminals T1-Tn operate through the communication facility C to be coupled with a central station D, an embodiment of which is illustrated in some detail.

Generally in accordance with the present development, individual callers use the individual telephone stations T1 through Tn to interface the station D through the communication facility C. Callers may be screened or qualified. Also in accordance herewith, the data of individual callers may be collected, correlated and tested in the station D for processing in accordance with various programs and external data. As a consequence, various objectives are accomplished. For example, a select subset of the callers may be isolated and specifically identified, or related data may be processed, or transactions may be actuated. The possibilities for application of the system are substantial and varied as will be apparent from the exemplary structure and functions as described in detail below.

In one operating process format, the public might be polled with regard to locating the specific

purchasers of a defective or dangerous product. Alternatively, the public might be polled with the objective of locating persons susceptible to a specific ailment or disease. Public auctions of unprecedented participation are possible. Legal lotteries are enabled that are interesting, effective and very economical on an individual participant basis. The system also might be employed in various game formats or to automate a promotion or mail-order operation, even to the extent of including inventory control as detailed below.

In each functional operating format, the callers may be variously qualified on the basis of entitlement and may be identified for subsequent verification. The callers then may be prompted, either through the interface or externally, to provide appropriate data.

Considering the system of FIGURE 1 in somewhat greater detail, it is to be understood that the communication facility C has multiplexing capability for individually coupling the terminals T1-Tn to the central station D on request. In the illustrative embodiment of the system, the communication facility C comprises a public telephone network and the individual terminals T1-Tn take the various forms of existing traditional or conventional telephone instruments.

The exemplary telephone terminal T1 is represented in some detail to include a hand piece 10 (microphone and earphone) and a panel 12 provided with a rectangular array of push buttons 14 in the conventional configuration. Of course, the hand piece 10 accommodates analog signals while the panel 12 is a digital apparatus. Generally in accordance herewith, the hand piece 10 serves to manifest analog signals vocally to the caller.

In accordance with conventional telephone practice, alphabetic and numeric designations are provided on the buttons 14. For example, several of the buttons 14 carry three letters along with a decimal digit. Specifically, the button designated with the numeral "2" also carries the letters "A", "B" and "C". In that manner, the buttons 14 encompass the numerals "0-9", two symbols, and the alphabet except for the letters "Q" and "Z". Consequently, the buttons 14 accommodate the entry of decimal data, and to some extent alphabetic data.

The buttons 14 designated with symbols "*" and "#", along with the numeral "0", can be used by predetermined assignment to represent the letters "Q" and "Z" or any of a variety of other data or command components. Generally, in accordance herewith, the buttons 14 are employed to formulate digital data at the central station D in various formats determined by the instant specific use and operating format of the system.

Considering the central station D in somewhat greater detail, the communication facility C is coupled to interface a series of processing systems P1 through Pn (FIGURE 1, left). Specifically, the communication facility C is connected to the processing systems P1-Pn through an associated series of automatic call distributors AC1 through ACn. Each of the automatic call distributors AC1-ACn accommodates one hundred lines from the communication facility C and accordingly, may accommodate and queue up to 100 calls.

Each of the automatic call distributors AC1-ACn may take various forms as well known in the prior art, functioning to queue incoming calls for connection to a lesser number of lines. In the disclosed embodiment, from each of the call distributors AC1-ACn, fifty

lines are connected respectively to the individual data processing systems P1-Pn through an interface 20 and a switch 21. Thus, in the disclosed embodiment, each of the automatic call distributors AC1-ACn can accommodate
5 one hundred lines, fifty of which may be active in association with one of the processing systems P.

The processing systems P1-Pn are similar, therefore, only the processing system P1 is shown in any detail. Collectively, the processing systems P1-Pn
10 are interconnected with a command computer terminal CT, at least one interface terminal IT, at least one printer PR and an audio unit AD. The command terminal CT is separately coupled to the audio unit AD.

As represented, the processing systems P1 through Pn each contain a number of individual function units or processors PR1 through PRn. Although various other configurations and arrangements may be employed, the explanation is facilitated by including a plurality of individual function units as treated in detail
15 below.

Considering the processing system P1, fifty lines from the automatic call distributor AC1 are connected to the interface 20, an exemplary form of which may be a commercially available Centrum 9000
20 unit. The interface 20 incorporates modems, tone decoders, switching mechanisms, DNIS and ANI capability (call data analyzer 20a) along with voice interface capability. Note that the interface may actually perform analysis on data. However, to preserve the
25 disclosed embodiment manageable, major analysis is explained with reference to processors.

Generally, DNIS capability is a function of the communication facility C (composite telephone system) to provide called terminal digital data
30 indicating the called number. ANI capability is a

similar function whereby the digital data indicates the calling number with calling terminal digital signals. Both capabilities are available for use with equipment as the interface 20 and to provide control through the call data analyzer 20a.

Accommodating up to fifty independent calls on separate communication paths to the central station D, the interface 20 is capable of providing analog (voice) signals to prompt each caller. Also accommodated are digital signals including the DNIS and ANI signals. The system contemplates the possibility of utilizing sequences of lines in rotary as well as blocking sequences of lines, the numbers for which command a particular program or operation format of a function unit as disclosed in detail below.

The interface 20 provides the connection of the fifty lines to a switch 21 which is in turn coupled to fifty function units, or processors PR1-PRn. As indicated above, multiple function units, or processors, are described in the disclosed embodiment to facilitate the explanation. Of course, non-parallel techniques and multiplexed operations might well be employed as alternatives. For a similar reason, as disclosed herein, each of the processors PR1-PRn includes memory cells for each of the callers' individual data. Development and compilation of data in such cells according to various operating formats is described below. In the disclosed embodiment, the processors PR1-PRn are connected collectively to the command computer terminal CT (incorporating a CRT display), the interface terminal IT, and the printer PR. Note that the CRT display serves to visually display data regarding select subsets as explained in detail below.

Exemplary detailed structures for the processors PR1-PRn are described below; however, in general, the units may comprise a microcomputer, for example, programmed as suggested above and as disclosed in detail below to accomplish specific operating formats. As an integral part of such formats, a caller may be qualified as belonging to an entitled set of persons or to accommodate specific demographic objectives. Also, callers may be designated both with respect to their significance and their identification. For example, callers may have different significance in a format, depending on the time or sequence of their call. Also, the designation of a caller may be exceedingly important in relation to the caller eventually being isolated as part of a subset, the members of whom must be accurately verified. As described below, the designations may involve multiple elements which may include: random number assignments, encryption techniques, utilization of calling numbers, identification data, sequence of call and so on to facilitate reliable verification. Note that the communication facility C has a customer billing structure B that is interfaced by the system.

On the qualification and designation of callers, the system enters a data accumulation phase during which digital data (formatted at one of the telephone terminals T1-Tn) is processed by one of the processors PR1-PRn. In general, the processing evolves a subset (at least one caller) the members of which may be verified and confirmed.

Either during the data accumulation phase, or after the processing phase to isolate a subset, a distinct operation may involve actuating the interface terminal T1 for direct local communication between the caller and an operator at the terminal T1. Another

distinct operation may involve actuation of the printer PR to provide documents in relation to the operating format, as for providing award certificates as for verifying members of an isolated subset. Also, charge
 5 slips may be generated containing at least part of the data of a particular transaction.

An appreciation of the philosophical operation of a system in accordance with the present invention may now be enhanced by considering an
 10 exemplary operation of the illustrative embodiment of FIGURE 1 to isolate a subset of people who are susceptible to a particular disease or infirmity. The exemplary operation might involve a geographical area, as a large city or population center, in which a
 15 particular health problem is somewhat acute. For example, a major population center might be polled where coronary artery disease is a significant problem. Accordingly, persons most susceptible to such disease could be identified for corrective recommendations.

20 People of the population center could be informed of the availability of a service for statistical health analysis. Accordingly, persons interested in their individual statistical situation would be motivated to utilize the service. Specifically,
 25 individual callers would use the remote terminals T1-Tn to contact the central station D through the communication facility C and thereby provide personal information that would enable a statistical analysis in relation to existing data so as to isolate and inform
 30 (either real time or batch basis) those persons statistically most likely to be in need of corrective measures. In such applications, it may be important that the caller's identity be subject to reliable verification. Other applications or programs also may
 35 present a critical need for positively verifiable

identification to the extent that credit card numbers and/or personal identification numbers may be employed.

An exemplary operation of the system, with regard to a specific caller, will now be treated referring somewhat concurrently to FIGURES 1, 2 and 3. As indicated above, FIGURE 2 indicates a data storage format for a memory cell in an exemplary processor PR and now will be considered with regard to an operating format in which data is composed for a caller. Pursuing the above example, assume the existence of a caller at the remote terminal T1 (telephone number (213) 627-2222) who wishes to pursue health-related information on the basis of statistical analysis. The caller lifts the hand piece 10 and in accordance with conventional techniques actuates the push buttons 14 to call for a select operating format, e.g. telephone number (213) 627-3333 and thereby establish communication through the facility C with a designated function unit in the central station D. Receiving the call signal, the automatic call distributor AC1 associates the called number ((213) 627-3333, rendered available using standard telephone DNIS techniques) through the interface 20 and the switch 21 to attain connection with the specific processor, e.g. the processor PR1 formatting the health-related program. Accordingly, the processor PR1 cooperates with the interface 20 to cue the interface 20 to operate as a voice generator.

The sequence of operations is represented to be initiated in FIGURE 3 by the "enter" block 40 which is accordingly followed by a "cue voice generator" command block 42. If the ANI equipment is not employed, the voice generator in the interface 20 formulates speech, a representative form of which might be: "Thank you for participating in the coronary artery disease statistical analysis. Please give us your

telephone number by actuating the call buttons on your telephone instrument."

Acting on the instructions, the caller would push the buttons 14 in sequence to indicate his
 5 telephone number, e.g. "(213) 627-2222". Alternatively, the interface 20 can accept the calling number ((213) 627-2222) according to its provision by standard ANI equipment of the communication facility C.

The resulting data signals are communicated
 10 from the interface unit 20 (FIGURE 1) to the processor PR1 for testing the telephone number as valid or entitled. Essentially, the format of a proper number prompts production of a valid or "good" signal. The test is indicated by the block 44 (FIGURE 3). If the
 15 response is not valid or entitled, for example contains an inappropriate number of digits or has been used to a point of excess, the operation of block 46 is initiated again cuing the voice generator 30 (FIGURE 1). The voice generator accordingly instructs the caller, e.g.:
 20 "You have not entered a proper telephone number. Please reenter your telephone number by pressing the appropriate call buttons." The caller is then allotted a predetermined period of time to make a proper entry with the consequence that the system moves to a test
 25 operation as indicated by the block 48 (FIGURE 3). Specifically, block 48 poses the query: "Is the second try good?"

If the caller is again unsuccessful, the system purges the record as indicated by the block 50
 30 and the call is terminated as indicated by the block 52. In an alternative mode, the processor PR1 may abort the interface and couple the interface terminal IT for direct personal communication with the caller. The interchange would then proceed, person-to-person.

If the caller responds with a proper telephone number, the operation proceeds. Specifically, the system sequences to record the response of the proper telephone number as indicated by the block 45.

5 That is, the caller's telephone number is recorded in an assigned specific memory cell identified with the caller. The format of the cell C1 is indicated in FIGURE 2. The first portion, section 53, contains a form of identification data, i.e., the caller's

10 telephone number, i.e. "(213) 627-2222".

Note that as explained above, if the second attempt to formulate a proper number is successful, as manifest by the block 48 (FIGURE 3), the response is recorded at that stage. In either case, exiting from the block 54 (FIGURE 3) invokes the next operation of again queuing the voice generator as indicated by the block 56.

15

As an alternative format, if a selective-group polling operation is performed, or callers are otherwise to be cleared for entitlement as mentioned above, a caller may be qualified by providing a "one-time" key number. The processor PR1 may incorporate a look-up table for proper key numbers which numbers may be coded using any of a wide variety of techniques. As

20

25 a simple illustrative example, the key may comprise a precise number of digits that always total a particular numerical value.

The system proceeds after the caller is qualified. Specifically, the cue to the voice generator of the interface 20 (FIGURE 1) as represented by the block 56 produces a request for further information from the caller with further identification data and answer data. For example, the voice generator might request information by stating: "Please use the

30

35 telephone buttons to indicate initials of your name."

The detailed operation is not represented in FIGURE 3 as it is similar to the operation illustrated by the blocks 42 through 54. However, again, a proper response is registered in the storage cell C1 as
 5 illustrated in FIGURE 2 by the number "53" also registered in the first section 53 of the cell.

The cycle of obtaining digital information from the caller next is repeated with respect to answer data, i.e. specific health data. For example, as
 10 illustrated in FIGURE 2, the next section 58 in the cell C1 receives an accumulation of health data, including the caller's age, weight, ..., pulse rate, and so on. Representative digital numbers are illustrated in FIGURE 2.

15 During the course of the telephonic communication, the processor PR1 formulates identification data for the caller specifically including: the chronological sequence of the call, the assigned designation of the call, and a set of acknowledgment
 20 digits for the call. Such data identification is registered in the caller's assigned cell C1 in accordance with the format of FIGURE 2 being stored in sections 62, 64 and 66. Note that the data may be stored in a coded interrelationship. For example, the
 25 acknowledgment digits may be related to the call record sequence. In the illustrative example, the chronological order number of the caller is 4951. The acknowledge digits may be derived from the sequence number. For example, as illustrated, a coded relation-
 30 ship may be established by adding "two" to each of the individual record sequence digits. Considering the example numerically:

	4951
	<u>2222</u>
35 Adding without propagated carries:	6173

Note that the confirmation data as acknowledgement digits can be extremely important, as to communicate with an isolated member of a subset. For example, identification could be published or circulated, as by a television broadcast, then respondents checked by use of confirmation data that may be confidential.

Continuing with the above example, the call chronological sequence registered for the caller is 4951 as represented in the section 62 while the acknowledge digits are 6173 as registered in the section 66. Additionally, the processor PR1 develops an assigned designation number, e.g. designation "4951684", which is registered in the section 64, the acknowledge code or digits, e.g. 6173, being registered in the section 66. These values are formulated in accordance with conventional number techniques during the data acquisition phase. With the exemplary numerals formulated, the operation proceeds.

The processor PR1 (FIGURE 1) cues the internal memory. That operation is indicated by the block 68 (FIGURE 3). Thus, the processor PR1 fetches the call record sequence number, assigns a designation (if not previously assigned), and encodes the sequence number as the acknowledgment digits (if not previously accomplished). These operations are indicated by the block 70 (FIGURE 3).

Next, the processor PR1 (FIGURE 1) cues the voice generator in the interface 20, as indicated by the block 72 (FIGURE 3) to provide information to the caller. Specifically, for example, the voice generator in the interface 20 (FIGURE 1) might signal: "This transaction has been designated by the number 4951684, and is further identified by the acknowledgment digits 6173. Please make a record of these numbers as they

will be repeated. Specifically, the designation number is 4951684. The acknowledgment digits are 6173. Please acknowledge this transaction by pressing your telephone buttons to indicate the acknowledge digits 6173." In various applications as those involving security, the order and acknowledgment of callers may be very important. Therefore, data for confirmation associated with the order is important.

The system next proceeds to the test mode as indicated by the block 76 (FIGURE 3). If the caller provides the correct acknowledgment digits, the data is confirmed in the record as indicated by the block 80 and is registered in the cell C1 (FIGURE 2). Additionally, the voice generator is sequenced as indicated by the block 82 (FIGURE 3) to indicate the close of the communication and that the transaction is terminated as represented by the exit block 84.

In the event that a caller cannot confirm his acknowledgment digits, as indicated by the block 76, a repeat operation is performed as indicated respectively by the blocks 86 and 88. Specifically, the voice generator is queued for a second instructional message. In the event that the second attempt also fails, the data is purged and the call discounted as indicated by block 90 and an exit block 92. If the second try is successful (test block 88), as indicated by the block 80, the record is perfected as indicated above.

As a result of the likelihood of a large number of calls, as described above, data cells in the processors PR1-PRn (FIGURE 1) are developed with specific information indicative of a statistical sampling of the populace of concern. The data of that statistical sampling may be self-generating of specific conclusions with respect to a subset of individuals, and/or supplemental data to clearly manifest a signi-

ficant subset. For example, the data may indicate a significant departure from an assumed normal characteristic. Such data, accumulated from the polling may be considered by logic comparisons in the computer 22
5 to select the subset of persons who should be isolated.

In addition to the self-generating conclusions available from the received data, the system may involve the introduction of external data. In the physical fitness example, such external data might take
10 the form of national statistical data. In any event, the processing operation usually involves comparison testing which compares caller data from individual memory cells of the processors P1-Pn (FIGURE 1) with test data that is supplied through the command terminal
15 CT.

In the above example, members of the public in general were invited to use the service. A number of alternatives exist which might well impact on the statistical analysis. For example, a list may be
20 preserved by a use-rate calculator to implement a consumable key operation. That is, a user is qualified to a specific limited number of uses during a defined interval.

As another example, callers might be restricted to the purchasers of a specific product as a
25 medical apparatus for measuring blood pressures, heart rates, or so on. In such situations, it will be apparent that the statistical data will be somewhat distorted from an average or normal sampling. Clearly,
30 the processors P1-Pn can be programmed to take into account such considerations. In that regard, the processors might also verify identification data proffered by a caller. Such data might take the form of a credit card number or a personal identification

number. Methods for verification of such numbers using computer techniques are discussed below.

As indicated above and detailed below, the system can be programmed or formatted for use in a variety of applications. Preliminary to considering exemplary forms of such applications, reference will now be made to FIGURE 4 showing an exemplary structural form for the processors PR1-PRn. From the switch 21 (FIGURE 1) a pair of communication lines 90 and 91 are indicated in FIGURE 4 (top left). The line 90 provides signals from a processing unit 92 while the line 91 provides signals to the processing unit 92 along with other components as represented in FIGURE 4. The separate lines 90 and 92 facilitate explanation.

The processing unit 92 may take the form of a mini-computer programmed to accommodate the functions of various applications, as disclosed in detail below. As indicated above, the system may utilize a plurality of independent function units or processing units, e.g., processing unit 92, operating in a somewhat parallel configuration, or alternatively, a limited number of processors may be driven sequentially to accommodate the functional operations as described.

The input line 91 (upper left) is connected specifically to a qualification unit 93, a sequencer 94 and a designation unit 96, as well as the processing unit 92 as indicated above. The qualification unit qualifies access from a remote terminal T1-Tn to the processing unit 92 as described in detail below. In accordance with various applications or operating formats, the qualification unit 93, the sequencer 94 and the designation unit 96 operate preliminarily with respect to individual callers. Generally, these units qualify or test callers for entitlement, develop a sequence-of-calls record and provide forms of designa-

tions for callers that may be authenticated. As described in detail below, the units function in sequence to accomplish such operations and accordingly are each individually connected to the processing unit 92 and a buffer storage 97. Essentially, the buffer storage 97 is illustrated separately from the processing unit 92 along with the unit 93, sequencer 94, unit 96, and so on, again in order to facilitate the explanation. Similarly illustrated are a memory 98 (with cells C1-Cn), a look-up table 103 and a clock 105.

Considering the processor of FIGURE 4 in further detail, the qualification unit 93 (upper left) is connected to a look-up table 99 and a use-rate calculator 100. The designation unit 96 (top center) is connected to a random number generator 101 and an encryptor 102.

In view of the above structural description of the system, consideration will now be given to certain specific applications in relation to the operation of the system. In that regard, the operation of the system will next be considered to automate a mail-order facility.

Assume that a caller at a terminal T1 (FIGURE 1) dials a specific number to identify a mail order interface with the system of FIGURE 1. For example, assume the telephone number "(213) 627-4444" for such an interface. Accordingly the caller dials the number at the remote terminal T1. As a result, the communication facility C couples the terminal T1 through the automatic call distributor AC1, the interface 20 and the switch 21 to a select processor PR1 identified and programmed for a mail-order operating format. Note that the communication facility C provides the dialed number ("(213) 627-4444") to the processing system P1

through well known telephonic equipment DNIS. Accordingly, a program is selected to execute the mail order interface.

As a preliminary action, a voice responder
 5 in the interface 20 might be cued by the processing unit to identify the mail-order house and indicate that the order will be taken by computer. Either before or after qualification, the caller might be advised that if he prefers to communicate directly with a person,
 10 or needs such contact at any point in the communication, he may accomplish it simply by pushing the asterisk button (*) at the terminal T1. Such action forms an abort signal that is detected by the processing unit 92 to transfer the communication to the
 15 interface terminal IT (FIGURE 1). Alternatively, the customer may be asked (by voice cue) to provide detailed information as name, address, etc. which is recorded for later processing.

After the preliminary information is supplied
 20 to a caller, the qualification phase is initiated. For example, the interface 20 might actuate the terminal T1 to announce: "Please indicate the type of credit card you will use for your purchase by pushing the button number 'one' for Mastercharge, 'two' for....."

25 The caller's response, indicating a specific credit card, will be stored in a data cell; however, the data is developed initially in the buffer 97. The format and data for the present example (in the buffer 97) will be explained with reference to a storage block
 30 format 104 as illustrated in FIGURE 5. The first data block 130 accordingly registers a digit to indicate the card that will be used to support the caller's purchase.

Using voice prompt, the interface 20 next
 35 instructs the caller to use the telephone buttons to

indicate his credit card number and the expiration date of the card. That data is stored in the register 104, specifically in the blocks 132 and 134 as illustrated in FIGURE 5.

5 Next, the caller is asked for his customer number, as it may appear on his catalog. That number is stored in a block 136 of the block format register 104. Note that the caller may not be identified in the files of the mail-order house and in that event, the operation may be shifted to a manual operation to be continued through the interface terminal IT (FIGURE 1) as explained above. For a television-initiated mail-order transaction, other numerical codes might be employed as to key into broadcast schedules. For example, a code might be used to indicate program times and thereby enable evaluation of the productivity of such program times. Such operation may be performed during the designation-phase as described below.

15 To continue with the explanation of the automated format, assume that the customer has a file customer number and that it is stored in the block format register 104 along with his credit card number and expiration date. From that location, the data is checked by the qualification unit 93 (FIGURE 4) for propriety as part of the test or qualification phase of operation. The check or test is in two stages and both are performed during an interval designated t1, the qualification unit 93 operating under control of the processing unit 92.

20 First, the data is verified as representing valid and proper data formats for the customer's number, the credit card number and expiration date. The second operation involves consulting a so-called negative list to assure that the identified card and customer's number have not been cancelled, as for

25

30

35

example in the case of credit cards that have been lost or stolen. Detailed structure for such tests is described in the parent case from which this case continues and may be incorporated in the qualification unit 93.

5 With the successful completion and verification of the preliminary data in the block format register 104, the qualification phase of operation is concluded and the system next interfaces with the
10 caller to acquire and process data for a specific order of merchandise. Note that in the mail-order operating format, the sequence of the call is not normally significant. However, the sequencer 94 may log the time during a period t_2 if deemed worthwhile.

15 Somewhat as described above in relation to the initial operating format (health poll), the voice generator in the interface 20 prompts the caller through a series of exchanges that load the storage block format register 104 with a merchandise order.
20 Thus, as purchase items are confirmed, the register 104 is loaded as exemplified by the blocks 140 and 142. The interchange continues until the customer indicates he does not wish to order any additional items. The system then operates the designation unit 96 (FIGURE 4)
25 during the interval t_3 to develop and announce the acknowledgement digits as stored in the block 144 (FIGURE 5). The acknowledgement digits serve to identify the order both for the caller and the mail-order house. Accordingly, tracing is facilitated. The
30 data (FIGURE 5) is then transferred from the buffer 97 (FIGURE 4) to a select memory cell C1-Cn.

 During the next interval t_4 , the processing unit 92 (FIGURE 4) isolates data of the cells C1-Cn to facilitate the mail-order process. In that regard, the

processor 92 may incorporate structure and processing techniques as disclosed in the parent case.

Of the wide variety of other operating formats and applications in accordance herewith,
5 further examples will now be described with reference to the systems of FIGURES 1 and 4. However, from a consideration of the operating formats treated below, it will be apparent that certain structural elements have reoccurring significance in the combination.
10 Specifically, such elements include the structures:
(1) utilizing the called number to select a specific operating format, (2) for screening or selecting callers who will be accepted based on various criteria, (3) for designating callers in a manner to enable
15 subsequent positive identification and (4) various processing aspects of the data manipulations including the provision of at least a portion of certain ID data provided directly from the telephone apparatus. With respect to the data processing, distinctive elemental
20 features include the utilization of external data not available during the interval of gathering data, the utilization of an interrelationship between the composite data collected during a data acquisition period, and the operation of utilizing time or sequence
25 of callers to accomplish a subset.

As the next illustrative operating format, an instant lottery system will be described. Accordingly, assume the existence of a legalized state lottery accommodated by the telephone system utilizing a pay-
30 to-dial number ("(213) 976-xxxx") and restricted to a limited number of uses for defined intervals of time. For example, a person might be entitled to play the lottery a limited number of times or to the extent of a limited dollar value during a predetermined interval.

From the terminal T1 (FIGURE 1) the caller would actuate the push buttons 14 to establish contact with the processing system P1 coupling would be through the communication facility C, the automatic call distributor AC1, the interface 20 and the switch 21 as described in detail above. The initial operation then involves qualification of the caller to participate in the instant winner lottery. Again, ANI or caller interface techniques may be employed. If the caller is involved, the interface 20 is actuated by the qualification unit 93 during the operating interval t1 to instruct the caller: "Please key in your telephone calling number". As indicated above, an alternative involves the system simply registering the calling number on the basis of its provision by ANI equipment.

In any event, after the caller's telephone number is registered, the instruction is given: "Participation in instant winner lottery is for persons over twenty-one years of age. Accordingly, please key in the year of your birth". A driver's license or credit card number may be similarly registered to confirm age. Alternatively, the combination of telephone number and date of birth could be used. In any event, the caller's data is registered and the qualification unit 93 then functions to test the data as provided. Specifically, the caller's telephone number is checked in a look-up table 99 to determine whether or not it is a proper and currently valid number for use in the lottery. Concurrently, the number is checked by the use-rate calculator to determine the number of times it has been used in excess of a predetermined number of calls or dollar value to participate in the lottery during a current interval of monitoring.

If the data indicates a qualified caller, the system proceeds to the next phase of designating the transaction. Note that the sequence is not significant in this operating format with the consequence that the interval t2 and the operation of the sequencer 94 may be bypassed. Rather, the designation unit 96 operates during the interval t3 to provide the caller with a designation for the current transaction and if applicable, updates the file as to current use or dollar value remaining for the caller's use. As explained above, the random generator 101 with or without the encryptor 102 may be employed to create an identification number which may include an encrypted form of the caller's telephone number. Accordingly, data for the transaction is established in the buffer 97 then set in a cell of the memory 98 (FIGURE 4). Specifically, the completed data cell format might be as follows:

Telephone No. - Birth Year - Designation - Random No.

The system next functions to generate the random number as indicated above which will then be tested against a series of other numbers to determine whether or not the caller is a winner. In that regard, elements in the processing unit 92 which accomplish the operation are illustrated in FIGURE 6 which will now be considered in detail.

A random number generator 160 functions on command to provide a three-digit number. With the consummation of a call, the random number generator 160 is actuated to provide the caller's random number in a selected caller cell 162. From that location, the caller's random number is compared with numbers from a register 164 by a comparator 166. The numbers in the register 164 were previously passed through a gate 174 from the generator 160. In the event of coincidence, the comparator provides an output "yes" signal to a

line 168. Conversely, the failure of coincidence prompts the comparator 166 to provide a "no" output to a line 170. Essentially, a "yes" indicates a win while a "no" indicates the caller has lost.

5 The elements of FIGURE 6 provide a random operating format to determine winners on a somewhat statistical basis; however, the system increases the probability with the passage of time when no win occurs. In that regard, at the outset of an operating
10 cycle, the random number generator 160 provides a random number that is passed through the gate 174 to the register 164. In the exemplary format, a three-digit number would be provided. At that stage, the caller's random number, from the cell 162, would be
15 compared with the single number in the register 164 by the comparator 166. However, with the passage of time, calls are tallied or time is metered by a counter 178. Accordingly, upon the attainment of a predetermined count, the gate 174 is again qualified to enter another
20 number in the register 164. Accordingly, an increasing set of numbers are held in the register 164 for comparison with each caller's number. Of course, the more numbers in the register 164, the higher probability of a caller winning and that relationship
25 depends upon the duration or number of calls since the last winner.

 Either a win or a loss as indicated within the processing unit 92 (FIGURE 4) prompts the interface
20 to respond appropriately to the caller announcing his results. If there is a win, the designation may be
30 reinforced and additional identification may be taken as explained above. Of course, if the prize simply involves a credit on the caller's telephone bill or his credit account, identification and designation become
35 less critical considerations.

In the event of substantial awards to be claimed, the processing system P1 (FIGURE 1) may actuate the printer PR to produce a positive identification of the winner, which document may be redeemed
5 only by the caller providing the assigned designation along with confirmation of his identification data.

Generally in relation to awards, the processing unit 92 may also utilize a random number format for determining the significance of awards. That is, a
10 random number may be actuated to provide numerals from one through twenty, for example, the magnitude of the number generated for a caller indicating the significance of his award. Normally such information would be provided to the caller and registered in his memory
15 cell.

With respect to memory cells generally, it is to be noted that actuated memory cells may be cleared for callers who are not winners. Accordingly, a limited number of memory cells store the subset of
20 winners for subsequent confirmation processing and so on.

As another operating process format in accordance with the present invention, consider an auction sale. As disclosed herein, the auction format
25 is associated with television as, for example, in the form of a cable channel for dedicated use during an interval of an auction sale.

Preliminarily, in accordance with the disclosed exemplary format, persons wishing to participate in the auction sale would make preliminary
30 arrangements involving utilization of the system to establish authorization data for qualified bidders in cells C1-Cn of the memory 98 (FIGURE 4). In an alternative format, the bidders could simply be

qualified immediately before bidding, as on the basis of a charge-card number or other identification.

Generally, it is contemplated that callers are coupled into the system only during the bidding on specific items of merchandise. Accordingly, some prequalification may be desirable to facilitate the rapid accumulation of a bidding group with the introduction of a unit of merchandise.

In accordance with the disclosed format, an auctioneer conducts the sale in a somewhat traditional manner, recognizing that he is interfacing a relatively large audience through the system of the present invention and with a television connection. Specifically, the auctioneer is cued as to audience reaction by a monitor incorporated in the command computer terminal CT (FIGURE 1). Essentially, the auctioneer is given an abstract or summary of the relative bidding as the auction progresses. In one format, the caller sees the auction on a television receiver. That is, the monitor may be covered by a television camera to inform the audience and particularly interested bidders. Consider the detailed steps of the operation.

As the auctioneer announces the next item for sale, it is televised to potentially interested bidders. In addition to being informed of the merchandise, potential bidders might also be reminded of the telephone number for participating in the auction. Accordingly, any interested person at a remote terminal T1-Tn may dial the auction number and obtain access to the processing systems P1-Pn. The caller would have a television set available, tuned for example to a cable channel.

Any preliminary qualification as indicated above will then be performed along with any appropriate designation. With regard to the designation, unless

callers are identified as part of the qualification step, the designation unit 96 (FIGURE 4) assigns a limited-digit number to individual callers for use by the auctioneer interfacing the command computer and terminal CT. Further designation and sequencing as disclosed herein also constitute part of the process. To the extent that qualification and designation operations may be performed, the operations are performed as described above with reference to FIGURE 4 by the qualification unit 93 and the designation unit 96. Of course, any of the safeguards and limitations as described herein may be employed as deemed appropriate for an auction format.

After the preliminaries, the auctioneer initiates the bidding with respect to a particular item that is observed by the callers on a television receiver as through a cable channel. Note that the audio may be variously coordinated through the telephone communication facility C and the audio channel of the caller's television. In a simple format, after an introductory phase, communication to callers with respect to the bidding is provided through the television link. Alternatively, the audio unit AD (FIGURE 1) may be employed.

Essentially, the auctioneer initiates the bidding by stating an initial value for the opening bid. Callers are invited to bid by actuating the push buttons 14 (FIGURE 1). For example, the auctioneer may invite an initial bid of one hundred dollars asking callers to so bid by entering an asterisk (*) by punching the button so designated. In accordance with one operating format, cells in the memory 98 (FIGURE 4) are actuated to register the bidding number in identified relationship with several calls. Note that although a record may be desirable, it is not usually

necessary to record all bids, particularly at initial bidding figures. In any event, the individual processing units, e.g. unit 92 in individual processors PR1-PRn are interconnected (FIGURE 1) and operate to select
5 the final and key bids.

After attaining the initial bid, the auctioneer may invite further bidding by seeking a bid of two hundred dollars or any bid. Such a bid might be accomplished either by punching the asterisk button to
10 attain the solicited bid, or by using number buttons to enter a different bid, e.g. two hundred fifty by buttons "2", "5" and "0". Again, cells of the memory 98 are actuated to record select bids (sequence) at the higher value.

15 The status of the bidding is presented to the auctioneer by the monitor of the command computer terminal CT (FIGURE 1). Specifically, the auctioneer is provided an indication of the number of bidders at each level. If a sizeable number of callers bid at a
20 specific value, the auctioneer may wish to advance the price significantly for the next round of bidding. Thus, the auctioneer proceeds until a small group of remaining callers are addressed. Note that the display of the command terminal CT (FIGURE 1) may also inform
25 the auctioneer of fresh bidders.

As the selection process proceeds, signals from the clock CL (FIGURE 1) are introduced to indicate the sequence of bidders. For example, assume the bidding has proceeded to a stage where only three
30 bidders remain active. The auctioneer is informed by the command terminal CT of the order in which the callers made their bids. The sequence is also of record in the cells of the memory 78 (FIGURE 4) to indicate the sequence in the event that the final bid
35 involves more than one caller. Of course, the first

caller to respond with a bid would have priority in the purchase.

Normally at the conclusion of the bidding on a particular item, the contents of the cells in the memory 98 would be purged with only the final bidders being held in general memory within the processing unit 92. Of course, it is important to maintain a record of back-up bidders in the event the sale is not consummated with respect to the first of the highest bidders. That is, a subset of the highest bidders is preserved for each item of merchandise in the event that the highest bidder fails to qualify or the sale otherwise cannot be consummated. Of course, a distinct advantage of the system is the ability to accommodate a vast auction participation group for items of substantial value and as a consequence the distillation of a subset of callers is exceedingly valuable information.

To consider another operating format in association with the television media, a system will now be described whereby television viewers participate on a real-time basis in a game show for prizes. The ability to involve television viewers in a program has the potential of expanding program interest along with the expanded participation.

Game shows in accordance herewith may take any of a wide variety of forms as several well known programs in which studio contestants compete for prizes. In utilizing the system of the present invention to involve remote participants, it may be desirable to preliminarily qualify and designate callers as explained above. Specifically, prior to participating in an actual game show, interested participants interface the system as depicted in FIGURE 1, and in the course of an exchange as described above, the qualification unit 93 and the designation unit 96

cooperate with the processing unit 92 to accomplish preliminary data on potential participants in cells of the memory 96.

5 Various games will involve different screening processes and clearances. For example, a child's television game format may require parental clearance and in that regard written communication may be required for approvals. Such approval may require the assignment of a personal identification number to the
10 child player as qualifying identification data.

As explained above, clearances may be perfected through the look-up table 99 (FIGURE 4) in association with the qualification unit 93 or approvals through a consumable key step may be extended to
15 incorporate functions of the processing unit 92 in association with the memory 98. For example, if qualification simply involves a check-off operation, the look-up table 99 will normally be employed. However, in the case of preregistration for a
20 participant, as in the case of the auction sale, the memory 98 is involved with the qualification unit 93 through the processing unit 92 to establish a data cell C1-Cn for each qualified participant. Thus, each potential participant to be qualified interfaces with
25 the processing unit 92 during a preliminary interval of operation to provide data in one of the cells C1-CN to facilitate qualification for participation during a real-time game show.

At the time of the show, callers are qualified simply by reference to their assigned memory cell
30 data for a verification. Thereafter, the caller's exchange information to supplement their data as with respect to the play which follows. Specifically for example, a caller might select a studio audience
35 participant with whom the caller is to be allied. The

interface operation may be essentially as described above wherein a voice generator in the interface 20 (FIGURE 1) provides signals which activate the remote telephone unit to speak the instruction: "If you wish
 5 to play with Player No. 1, please push button No. 1; if you wish to play with Player No. 2, please push button No. 2 and so on". The caller may also be instructed to indicate the extent of a wager. For example,
 10 "Push the number button indicating the points you wish to risk".

The participant data is stored in an assigned cell of the memory 98 (FIGURE 4) for the caller and as the game proceeds, the processing unit 92 tallies the caller's score. Scores are interrelated between
 15 individual processing units to actuate the terminal CT. Thus, individual accounting occurs for each of the calling participants on an on-line basis dependent upon the success of the studio players and their association with the callers. On-going accounting data may be
 20 provided at intervals or real time by the recorded voice to each contestant.

According to the described format, after an interval of play, the processing units, as the unit 92 (FIGURE 4), operate to isolate a subset of caller-
 25 players who have amassed the highest scores. Of course, various arrangements may be provided for awarding prizes to the select subset of winning callers.

The above format involves a real-time game
 30 show with an on-line operating format. A somewhat similar format involves nonreal-time operation and in that sense, callers may interface with the system of the present invention before and after the show; however, not primarily during the show. Such a show
 35 might involve a quiz for callers based on their ability

to perceive and remember occurrences within the show. Preregistration may be employed, however, is not essential. Rather, callers may call after the broadcast of a program. In that event, sequence or time
 5 clocking may be very important to limit or control individual interfaces to a specific time or geographic "window". That is, as suggested above, allocation-routing equipment and techniques may be employed in various of the formats to window callers. With the
 10 system, callers are screened or qualified at the time of a call, identified in a particular calling sequence, designated for identification and quiz answers are given for subsequent processing. Alternatively, players could participate by providing their credit
 15 card for billing or be billed through the "pay-to-dial" network. Consider an exemplary format.

A key to participation in the game show may involve the purchase of a particular product. For example, a person desiring to participate may purchase
 20 a product which carries a concealed key number. The number serves as a caller's key to participation in the game show.

In accordance with the disclosed operating format, after watching the broadcast of a television
 25 show (possibly a serial episode) the participant actuates the push buttons 14 at one of the remote terminals T1-Tn to accomplish an interface communication with the select operating format. For example, the caller may actuate the buttons 14 for the station
 30 number "277-7777" which identifies the game format of current description.

Assume responsive operation of the communication facility C to couple the caller through the automatic call distributor AC1 to the interface 20.
 35 Upon establishing a connection, the interface 20

receives the caller's telephone number through ANI equipment and a data cell in the memory 98 (FIGURE 4) is assigned to the caller. Specifically, for example, associative coupling is provided for the caller through the switch 21 (FIGURE 1) to the processor PR1 containing the memory 98 (FIGURE 4) and a cell C2 assigned to the caller. A block format 200 is illustrated in FIGURE 7 indicating the data that is developed in the cell C2. At the outset, the caller's telephone number is stored in a section 201 followed by uses/month in section 202.

Next, the caller is greeted and requested to give the key number entitling him to participate in the game show. The instruction constitutes an initial action to take place in an interval of qualification during the time t1. The caller actuates the buttons 14 providing digital representations to the qualification unit 93 (FIGURE 4) and the look-up table 99 is consulted. Note that the table 99 may be a large, shared unit that tabulates each of the key numbers and accounts for their use. If the caller has identified a proper key number, the process proceeds and the key number is accounted, i.e., incremented or decremented to the limit of use if any. Alternatively, a repeat information operation may be requested as described in detail above.

As a further check during the qualification stage, the use-rate calculator 100 may function to determine whether or not an excessive number of calls have originated from the designated number. Thus, consideration involves calls or value with reference to a predetermined period of time. Again, a shared calculator may be used or addressing may obtain selectivity on the basis of calling numbers. If a large number of calls have originated from a single

telephone terminal, a fraudulent situation may be suggested. Assuming no such indication occurs, the number of uses is registered in a section 200 (FIGURE 7) and the operation proceeds from the interval t1 to interval t2.

During the interval t2, the sequencer 94 registers the precise time of the call in the buffer storage 97, specifically in a section 204 as illustrated in FIGURE 7. With the entry of such data, the system passes from the operating interval t2 to t3.

The caller is next asked to identify himself in some specific manner. For example, the caller may simply be asked to provide the year of his birth. Alternatively, somewhat comprehensive information may be taken as in the form of drivers' license numbers, social security numbers and so on. Of course, such data may be employed for subsequent identification of the caller and, accordingly, is registered in the buffer storage 97 (FIGURE 4). Specifically, identification information is registered in section 206 of the block 200 as shown in FIGURE 7.

In addition to receiving identification information from a caller, the system assigns a designation to the caller. Specifically, the random number generator 101 (FIGURE 4) provides a number which may be encrypted along with other identification data as the caller's personal identification to provide a numerical designation that is registered in the storage 97. Specifically, the designation is stored in a section 208 as illustrated in FIGURE 7. With the designation operation complete, the interval t3 terminates initiating the data accumulation phase which occurs during an operating interval t4.

At this juncture, operating elements within the processing unit 92 will be considered in relation

to an explanation of the manner in which select questions are provided to a caller and his answers received and recorded for subsequent processing to determine winners.

5 Preliminarily, reference will be made to
FIGURE 8 showing elements involved in the operating
format which are contained in the processing unit 92
(FIGURE 4) in association with the memory 98. To avoid
confusion, the elements identified in FIGURE 8 are
10 designated by fresh numerals.

To accommodate the exemplary operating
format, a dramatic program might be recorded prepara-
tory to the television broadcast. A substantial number
of questions would then be formulated based on the
15 dramatic program. For example, "How many people were
present when the will was read?"

It is contemplated that the dramatic program
would be broadcast to different geographical segments
of the country during different time intervals. To
20 accommodate the different time intervals, it is
proposed to utilize different questions for each
geographic segment. That is, the basic format can
remain the same, only the questions change by time zone
to avoid study and collaboration on questions as a
25 result of time shifts. A question propounded to a
Chicago caller should not be repeated to a Los Angeles
caller. In any event, callers might be given three
questions randomly drawn from a pool serving one
geographic segment and three questions drawn from a
30 different pool serving another geographic segment.

The signals for prompting a voice generator
are registered in memory sections MS1 through MSn.
Each of the memory sections MS1-MSn is served by an
address input AI1-AIn respectively. Similarly, the
35 address inputs AI1-AIn are instructed by random number

generators NG1-NGn, in turn actuated by decoders DE1-DEn. Consider the operating sequence of the memory MS1 as an example.

5 The decoder DE1 is responsive to telephone
calling numbers (provided by ANI equipment) indicative
of a particular geographic area. Note, for example,
that area code numbers afford an effective geographic
classification of callers which is very useful in many
10 formats or processes of statistical analysis in
accordance herewith. Note that geographic (or other)
classification in accordance herewith is also accom-
plished by the called numbers provided. Each of
several television stations would solicit calls for
different numbers as a result, either by DNIS or call
15 channeling. Select processors would be reached through
the interface units, e.g. interface 20 FIGURE 1. In
operation, the decoder DE1 determines a call is from a
specific geographic area and accordingly provides a
signal to actuate the random number generator NG1. As
20 a consequence, the random number generator NG1 provides
a series of three random numbers in the form of
addresses for the memory MS1. That is, the addresses
may simply comprise three alphanumeric bits supplied to
the address input AI1 to prompt the provision of three
25 sets of voice generator signals for announcing the
three questions in sequence. For example, the first
question might be as suggested above: "Push the button
on your telephone for the number of persons present in
the room when the will was read".

30 The voice generator signals are supplied from
the memory MS1 (within the processing unit 92, FIGURE
4) to the interface 20 (FIGURE 1) which generates audio
signals to actuate the caller's hand piece 10.
Accordingly, the caller is instructed to answer three
35 questions, the responses being recorded in a section

210 of the data block 200 (FIGURE 7). Note that the clock 105 (FIGURE 4) may be utilized to limit the response period allowed each caller.

As indicated above, to accommodate broadcast
5 of the program in a different time slot for a different geographic area, the decoder DEN (FIGURE 8) actuates the random number generator NGN to address the memory MSn to provide three different questions as a result of a random selection. Accordingly, within a time or
10 times (perhaps limited and offset) after the conclusion of the program, a substantial number of callers are accounted for in cells of the memory 98 and similar units of the composite system. The cells indicate sequences of calling and also may contain billing data
15 where appropriate. That is, pay-to-dial operations avoid the need for billing, yet it may still be made of record.

Subsequent to the data accumulation phase of operation, the processing unit 92 (and its equivalents)
20 is actuated during an off-line processing interval to isolate the subset of callers correctly responding to the questions. In accordance with one format, the subset of successful callers may be reduced to a sub-subset as by a random computer "draw" to define a group
25 of significant winners. That is, a random number generator may be employed as explained above.

As an alternative to subsequent processing, the system may inform callers of their success during the course of the interface telephone call. That is,
30 callers might simply be informed by cuing the voice generator: "Your answers are correct and in accordance with the program game, you will now be entered in the sweepstakes draw for the prize" Thus, the format defines a subset then further selects a sub-subset of
35 winners. In any of the various formats, the status of

the analysis can be televised by selecting a camera focused on the interface terminal IT.

Still another operating format for the system takes the form of polling operations to determine opinion or facts. An illustrative form of the format is disclosed below again in association with a television broadcast.

Generally, the illustrative polling format is contemplated in association with a television broadcast addressing a matter of current interest as, for example, a political issue or election. A master of ceremonies propounds questions to a viewing audience, many of whom are on-line through an interface of a system of the present invention. The master of ceremonies or commentator instructs the callers who are regulated and controlled by the system of the present invention to provide digital data which the system processes to inform the commentator as with regard to subsets of callers. For example, the commentator may be statistically informed as to the numbers of callers holding specific views. Consider a specific exemplary operating format.

Assume the existence of a system in accordance with the present invention installed for use in association with a television broadcasting facility. Of course, various previous arrangements could be involved; however, according to one arrangement a commentator simply invites members of the viewing audience to call a specific number and express their views with respect to a specific issue. Callers located at terminals T1-Tn (FIGURE 1) activate the terminals to accomplish an interface with one of the processing systems P1-Pn as explained above. Note that the processor (or the interface 20 may involve operation of the qualification unit 93 (FIGURE

4) to prevent callers from loading the poll. That is, to prevent multiple calls from a single terminal that would distort a poll, the qualification unit 93 registers calls in association with the use-rate calculator 100. Interfacing a specific processor, callers are screened by the qualification unit 93 (FIGURE 4). In such a poll, it may be important to control the sampling group on a statistical basis. For example, it may be desirable to limit callers from each of several geographic areas. Accordingly, by the use of ANI equipment, the caller's telephone number is provided to the qualification unit 93 during the preliminary interval t1, and a determination is performed with regard to the number of involved callers from the geographic area using the look-up table 99. On attaining a full quota from a specific area, a subsequent caller may be informed that the lines are full. Alternatively, the caller may be requested to provide his telephone number for screening in the event ANI equipment is not available.

The caller may be requested to provide additional information so as to poll a balanced group. For example, a caller might be asked questions concerning age, political registration and so on by prompting the interface unit 20 to pose audio questions and testing the digital results through the qualification unit 93 as with reference to the look-up table 99.

As indicated above, in the event that the broadcast television program is one of a series, it may be desirable to limit the extent of participation over a period of several programs. Accordingly, the use-rate calculator 100 (FIGURE 4) may be employed in association with the qualification unit 93. That is, if a calling number has participated in a prior poll, it may be denied access for a subsequent poll or its

data not counted. Such operation would involve the use-rate calculator 100 in association with the qualification unit 93 performing logic tests to actuate the voice generator of the interface 20 for providing an appropriate interchange with a caller.

5 With the screening or qualification of a select group of callers, the sequencer 94 (FIGURE 4) may or may not be involved to identify the order of callers. Also, the designation unit 96 may or may not
10 be involved in view of the fact that for many polls there is little interest in subsequently identifying callers.

 In the poll-format operation of the system, it is important to provide a capability of defining
15 select intervals during which callers may provide data. In one arrangement, with the consummation of a communication interface between a caller and a processor unit, the audio of the television broadcast is keyed from the audio unit AD through the switch 21 (FIGURE 1)
20 for communication to the caller.

 With a multiplicity of callers in interface relationship with the processors PR1-PRn as function units, a polling question is stated, for example: "If
25 you favor expanded trade with ... at the tone press button one; if you do not, press button two".

 To control the interval of polling, the command computer terminal CT (FIGURE 1) is actuated to enable the callers timely access to the processors.

 At the expiration of a polling interval, the
30 interfaces may be terminated or additional questions may be propounded. In any event, subsequent to the data-gathering phase, the bulk data is supplied to the command computer terminal CT incorporating computing facility to isolate subsets for communication by the
35 broadcast. Accordingly, an effective on-line poll can

be conducted with statistical sampling control and prompt display of responses.

As explained above, the arrangement of the function unit (or units) may be variously embodied in a single processor or many processors, depending on various considerations as time sharing, multiplexing, paralleling and so on. The systems as described above embody the components bulked together in one location. However, components of the system could be spaced apart geographically, using dedicated lines or polling techniques. An illustrative embodiment is shown in FIGURE 9.

Call distributors CD1-CDn are at different geographic locations along with associated interface units IA1-IA_n and IB1-IB_n. Each of the interface units, as unit IA1 is coupled to a central processor 251 as indicated by lines 252, 254, 256 and 258. Each of the lines may take the form of a dedicated telephone line or a polling telephonic coupling.

In the operation of the system of FIGURE 9, the call distributors CD are coupled to a telephonic communication system and accordingly allow the interface units I to provide interface communication between the central processing unit 251 and a multitude of remote terminals T1-T_n as illustrated in FIGURE 1. With data accumulated in the cells, it may be variously down loaded as to a central processing station. Thus, the distributed-component system is capable of executing the various formats as explained above with reference to the illustrative structure.

In view of the above explanation of exemplary systems, it will be appreciated that other embodiments of the present invention may be employed in many applications to accumulate statistical data, process such data, and define subsets of callers of concern.

While certain exemplary operations have been stated herein, and certain detailed structures have been disclosed, the appropriate scope hereof is deemed to be in accordance with the claims as set forth below.

5

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
2222
2223

WHAT IS CLAIMED IS:

1 1. A statistical analysis system for use
 2 with a communication facility including remote terminal
 3 apparatus for individual callers, wherein said remote
 4 terminal apparatus may comprise a conventional tele-
 5 phone instrument including voice communication means,
 6 and digital input means in the form of an array of
 7 alphabetic numeric buttons for providing identifi-
 8 cation and statistical data, said control system
 9 comprising:

10 interface means coupled to said communication
 11 facility to interface said terminal apparatus for voice
 12 and digital communication and including means to
 13 provide signal values from data developed by said
 14 terminal apparatus said interface means further
 15 including a consumable key test means to qualify
 16 callers with respect to limited use;

17 voice generator means coupled through said
 18 interface means for actuating said terminal apparatus
 19 as to provide vocal operating instructions to an
 20 individual caller; and

21 means connected to said interface means for
 22 processing said statistical data as to isolate a subset
 23 of said individual callers.

1 2. A statistical analysis system for use
 2 with a communication facility including terminal
 3 apparatus for individual callers, wherein said terminal
 4 apparatus may comprise a conventional telephone
 5 instrument including voice communication means and
 6 digital input means in the form of an array of alpha-
 7 betic numeric buttons for providing identification and
 8 statistical data, said control system comprising:

9 interface means coupled to said communication
 10 facility to interface said terminal apparatus for voice

and digital communication and including means to provide signals representative of identification and statistical data developed by said terminal apparatus;

voice generator means coupled through said interface means for actuating said terminal apparatus as to provide vocal operating instructions to an individual caller;

record means connected to said interface means for initiating a file and storing data relating to specific of said callers;

means coupled to said interface means and said record means for assigning individual designations to callers and storing said designations in said record means, said designations including representations indicative of the calling order sequence of said individual callers; and

means connected to said record means for processing statistical data as to identify a subset of said individual callers.

3. A statistical analysis system for use with a communication facility including terminal apparatus for individual callers, wherein said terminal apparatus may comprise a conventional telephone instrument including voice communication means, and digital input means in the form of an array of alphabetic numeric buttons for providing identification and statistical data, said control system comprising:

interface means coupled to said communication facility to interface said terminal apparatus for voice and digital communication and including means to provide signals representative of identification and statistical data developed by said terminal apparatus;

voice generator means coupled through said interface means for actuating said terminal apparatus

as to provide vocal operating instructions to an individual caller; and

manual terminal means for use by a person to communicate directly with at least one of said individual callers, said manual terminal means being coupled to said interface means and responsive to predetermined conditions to couple said manual terminal means to a caller terminal.

4. A system according to claim 3 further including means connected to said interface means for processing said statistical data as to isolate a subset of said individual callers and thereby actuate said manual terminal means.

5. A statistical analysis system for use with a communication facility including terminal apparatus for individual callers, wherein said terminal apparatus may comprise a conventional telephone instrument including voice communication means, and digital input means in the form of an array of alphabetic numeric buttons for providing identification and statistical data, said control system comprising:

interface means coupled to said communication facility to interface said terminal apparatus for voice and digital communication and including means to provide signals representative of identification and statistical data developed by said terminal apparatus;

voice generator means coupled through said interface means for actuating said terminal apparatus as to provide vocal operating instructions to an individual caller;

record means connected to said interface means for initiating a file and storing identification

20 data and statistical data for specific callers inclu-
21 ding data developed by said terminal apparatus;
22 means coupled to said interface means and
23 said record means for assigning individual designations
24 to callers and storing said designations in said record
25 means; and
26 means for recalling data stored in said
27 record means in response to said individual designa-
28 tions.

1 6. A statistical analysis system for use
2 with a communication facility including terminal
3 apparatus for individual callers, wherein said terminal
4 apparatus may comprise a conventional telephone
5 instrument including voice communication means, and
6 digital input means in the form of an array of alpha-
7 betic numeric buttons for providing identification and
8 statistical data, said control system comprising:

9 interface means coupled to said communication
10 facility to interface said terminal apparatus for voice
11 and digital communication and including means to
12 provide signals representative of identification and
13 statistical data developed by said terminal apparatus;

14 voice generator means coupled through said
15 interface means for actuating said terminal apparatus
16 as to provide vocal operating instructions to an
17 individual caller;

18 record means connected to said interface
19 means for initiating a file and storing identification
20 data and statistical data for specific callers inclu-
21 ding data developed by said terminal apparatus;

22 means coupled to said interface means and
23 said record means for assigning individual designations
24 to callers and storing said designations in said record
25 means, said designations including representations of

26 the telephone number of the terminal apparatus used by
27 a caller; and
28 means connected to said record means for
29 processing statistical data as to identify a subset of
30 said individual callers.

1 7. A statistical analysis system for use
2 with a communication facility including terminal
3 apparatus for individual callers, wherein said terminal
4 apparatus may comprise a conventional telephone
5 instrument including voice communication means, and
6 digital input means in the form of an array of alpha-
7 betic numeric buttons for providing identification and
8 statistical data, said control system comprising:

9 interface means coupled to said communication
10 facility to interface said terminal apparatus for voice
11 and digital communication and including means to
12 provide signals representative of identification and
13 statistical data developed by said terminal apparatus;

14 voice generator means coupled through said
15 interface means for actuating said terminal apparatus
16 as to provide vocal operating instructions to an
17 individual caller;

18 record means connected to said interface
19 means for initiating a file and storing identification
20 data and statistical data for specific callers inclu-
21 ding data developed by said terminal apparatus; and

22 means coupled to said interface means and
23 said record means for assigning individual designations
24 to callers and storing said designations in said record
25 means, said designations including an encrypted
26 representation of said data developed by said terminal
27 apparatus. .

1 8. A statistical analysis system for use
2 with a communication facility including remote terminal
3 apparatus for individual callers, wherein said remote
4 terminal apparatus may comprise a conventional tele-
5 phone instrument including voice communication means
6 and digital input means in the form of an array of
7 alphabetic numeric buttons for providing identification
8 and statistical data and wherein said facility may
9 provide calling terminal digital signals to a called
10 station representative of a remote calling terminal,
11 said control system comprising:

12 interface structure coupled to said commu-
13 nication facility to interface said terminal apparatus
14 for voice and digital communication and including means
15 to provide signal values from signals representative of
16 data developed by said terminal apparatus;

17 voice generator means coupled through said
18 interface means for actuating said terminal apparatus
19 as to provide vocal operating instructions to an
20 individual caller;

21 analysis means connected for processing data
22 from a plurality of callers in combination to isolate a
23 select subset of said callers by interrelated proces-
24 sing; and

25 call data analyzer structure for modifying
26 said data from a plurality of callers under control of
27 said terminal digital signals.

1 9. A control system according to claim 8
2 further including record means connected to said
3 interface means for initiating a file and storing said
4 terminal digital signals as identification at least in
5 part for a caller.

1 10. A control system according to claim 8
2 further including switch means whereby passage of said
3 data from a plurality of callers to said analysis means
4 is controlled by said terminal digital signals.

1 11. A statistical analysis system for use
2 with a communication facility including remote terminal
3 apparatus for individual callers, wherein said remote
4 terminal apparatus may comprise a conventional tele-
5 phone instrument including voice communication means
6 and digital input means in the form of an array of
7 alphabetic numeric buttons for providing identification
8 and statistical data and wherein said facility may
9 provide called terminal digital signals to a called
10 station representative of the called station, said
11 control system comprising:

12 interface means coupled to said communication
13 facility to interface said terminal apparatus for voice
14 and digital communication and including means to
15 provide signal values from signals representative of
16 data developed by said terminal apparatus;

17 voice generator means coupled through said
18 interface means for actuating said terminal apparatus
19 as to provide vocal operating instructions to an
20 individual caller;

21 analysis means connected to said record means
22 for processing said statistical data from a plurality
23 of callers in combination and in accordance with a
24 plurality of distinct formats to isolate a select
25 subset of said callers by interrelated processing; and

26 means for actuating one of said distinct
27 formats in accordance with said called terminal digital
28 signals.

1 12. A statistical analysis system for use
2 with a communication facility including remote terminal
3 apparatus for individual callers, wherein said remote
4 terminal apparatus may comprise a conventional tele-
5 phone instrument including voice communication means
6 and digital input means in the form of an array of
7 alphabetic numeric buttons for providing identification
8 and statistical data, said control system comprising:

9 coupling structure including a plurality of
10 interface units each capable of accommodating a
11 plurality of communication paths coupled to said
12 communication facility to interface said terminal
13 apparatus for voice and digital communication and
14 including means to provide signal values from signals
15 representative of data developed by said terminal
16 apparatus;

17 voice generator means in said interface means
18 coupled for actuating said terminal apparatus as to
19 provide vocal operating instructions to an individual
20 caller;

21 record means connected to said interface
22 means for initiating a file and storing identification
23 data and statistical digital data for specific callers
24 including data developed by said terminal apparatus;
25 and

26 analysis means connected to said record means
27 for processing said statistical data from a plurality
28 of callers in combination to isolate a select subset of
29 said callers by interrelated processing.

1 13. A system according to claim 12 further
2 including means for queuing said remote stations to
3 said coupling means whereas to sequence interface
4 communications. .

1 14. A statistical analysis system for use
2 with a communication facility including remote terminal
3 apparatus for individual callers, wherein said remote
4 terminal apparatus may comprise a conventional tele-
5 phone instrument including voice communication means
6 and digital input means in the form of an array of
7 alphabetic numeric buttons for providing identification
8 and statistical data, said control system comprising:

9 interface structure coupled to said commu-
10 nication facility to interface said terminal apparatus
11 for voice and digital communication and including means
12 to provide signal values from signals representative of
13 data developed by said terminal apparatus;

14 voice generator means coupled through said
15 interface means for actuating said terminal apparatus
16 as to provide vocal operating instructions to an
17 individual caller;

18 analysis means connected for processing data
19 from a plurality of callers in combination to isolate a
20 select subset of said callers by interrelated process-
21 ing; and

22 qualification means for qualifying access
23 from said remote terminal apparatus to said analysis
24 means.

1 15. A system according to claim 14 wherein
2 said qualification means comprises means for limiting
3 access from a remote terminal to said analysis means on
4 the basis of accesses per interval of time.

1 16. A system according to claim 14 wherein
2 said qualification means comprises means for limiting
3 access from a remote terminal to said analysis means
4 under control of said signals representative of data
5 developed by said terminal apparatus.

1 17. A system according to claim 16 wherein
2 said qualification means includes a look-up table.

1 18. A system according to claim 16 wherein
2 said qualification means includes a use-rate
3 calculator.

1 19. A statistical analysis system for use
2 with a communication facility including remote terminal
3 apparatus for individual callers, wherein said remote
4 terminal apparatus may comprise a conventional tele-
5 phone instrument including voice communication means
6 and digital input means in the form of an array of
7 alphabetic numeric buttons for providing identification
8 and statistical data, said control system comprising:
9 interface structure coupled to said commu-
10 nication facility to interface said terminal apparatus
11 for voice and digital communication and including means
12 to provide signal values from signals representative of
13 data developed by said terminal apparatus;
14 voice generator means coupled through said
15 interface means for actuating said terminal apparatus
16 as to provide vocal operating instructions to an
17 individual caller; and
18 analysis means connected for processing data
19 from a plurality of callers in combination to isolate a
20 select subset of said callers by interrelated process-
21 ing including a display structure for visually display-
22 ing data regarding said select subset.

1 20. A system according to claim 19 further
2 including a printer.

1 21. A statistical analysis system for use
2 with a communication facility including remote terminal
3 apparatus for individual callers, wherein said remote
4 terminal apparatus may comprise a conventional tele-
5 phone instrument including voice communication means
6 and digital input means in the form of an array of
7 alphabetic numeric buttons for providing identification
8 and statistical data, said control system comprising:

9 interface structure coupled to said commu-
10 nication facility to interface said terminal apparatus
11 for voice and digital communication and including means
12 to provide signal values from signals representative of
13 data developed by said terminal apparatus;

14 voice generator means coupled through said
15 interface means for actuating said terminal apparatus
16 as to provide vocal operating instructions to an
17 individual caller;

18 a sequencer for developing sequence data
19 signals as identification data;

20 record means connected to said interface
21 means for initiating a file and storing identification
22 data and statistical digital data for specific callers
23 including data developed by said terminal apparatus;
24 and

25 analysis means connected to said record means
26 for processing said statistical data from a plurality
27 of callers in combination to isolate a select subset of
28 said callers by interrelated processing.

1 22. A statistical analysis system for use
2 with a communication facility including remote terminal
3 apparatus for individual callers, wherein said remote
4 terminal apparatus may comprise a conventional tele-
5 phone instrument including voice communication means
6 and digital input means in the form of an array of

7 alphabetic numeric buttons for providing identification
 8 and statistical data, said control system comprising:
 9 interface structure coupled to said commu-
 10 nication facility to interface said terminal apparatus
 11 for voice and digital communication and including means
 12 to provide signal values from signals representative of
 13 data developed by said terminal apparatus;
 14 voice generator means coupled through said
 15 interface means for actuating said terminal apparatus
 16 as to provide vocal operating instructions to an
 17 individual caller;
 18 a qualification unit for developing qualifi-
 19 cation data signals as identification data;
 20 record means connected to said interface
 21 means for initiating a file and storing identification
 22 data and statistical digital data for specific callers
 23 including data developed by said terminal apparatus;
 24 and
 25 analysis means connected to said record means
 26 for processing said statistical data from a plurality
 27 of callers in combination to isolate a select subset of
 28 said callers by interrelated processing.

1 23. A statistical analysis system for use
 2 with a communication facility including remote terminal
 3 apparatus for individual callers, wherein said remote
 4 terminal apparatus may comprise a conventional tele-
 5 phone instrument including voice communication means
 6 and digital input means in the form of an array of
 7 alphabetic numeric buttons for providing identification
 8 and statistical data, said control system comprising:
 9 interface structure coupled to said commu-
 10 nication facility to interface said terminal apparatus
 11 for voice and digital communication and including means

12 to provide signal values from signals representative of
13 data developed by said terminal apparatus;

14 voice generator means coupled through said
15 interface means for actuating said terminal apparatus
16 as to provide vocal operating instructions to an
17 individual caller;

18 a designation unit for developing designation
19 data signals as identification data consisting of at
20 least two data elements;

21 record means connected to said interface
22 means for initiating a file and storing identification
23 data and statistical digital data for specific callers
24 including data developed by said terminal apparatus;
25 and

26 analysis means connected to said record means
27 for processing said statistical data from a plurality
28 of callers in combination to isolate a select subset of
29 said callers by interrelated processing.

1 24. A statistical analysis system for use
2 with a communication facility including remote terminal
3 apparatus for individual callers, wherein said remote
4 terminal apparatus may comprise a conventional tele-
5 phone instrument including voice communication means
6 and digital input means in the form of an array of
7 alphabetic numeric buttons for providing identification
8 and statistical data, said control system comprising:

9 interface structure coupled to said commu-
10 nication facility to interface said terminal apparatus
11 for voice and digital communication and including means
12 to provide signal values from signals representative of
13 data developed by said terminal apparatus;

14 voice generator means coupled through said
15 interface means for actuating said terminal apparatus

16 as to provide vocal operating instructions to an
 17 individual caller;
 18 a sequencer for developing sequence data
 19 signals as identification data;
 20 a qualification unit for developing qualifi-
 21 cation data signals as identification data;
 22 a designation unit for developing designation
 23 data signals as identification data;
 24 record means connected to said interface
 25 means for initiating a file and storing identification
 26 data and statistical digital data for specific callers
 27 including data developed by said terminal apparatus;
 28 and
 29 analysis means connected to said record means
 30 for processing said statistical data from a plurality
 31 of callers in combination to isolate a select subset of
 32 said callers by interrelated processing.

1 25. A statistical analysis system for use
 2 with a communication facility including remote terminal
 3 apparatus for individual callers, wherein said remote
 4 terminal apparatus may comprise a conventional tele-
 5 phone instrument including voice communication means
 6 and digital input means in the form of an array of
 7 alphabetic numeric buttons for providing identification
 8 and statistical data, said control system comprising:
 9 interface structure coupled to said commu-
 10 nication facility to interface said terminal apparatus
 11 for voice and digital communication and including means
 12 to provide signal values from signals representative of
 13 data developed by said terminal apparatus;
 14 voice generator means coupled through said
 15 interface means for actuating said terminal apparatus
 16 as to provide vocal operating instructions to an
 17 individual caller;

18 record means connected to said interface
19 means for initiating a file and storing identification
20 data and statistical digital data for specific callers
21 including data developed by said terminal apparatus;
22 analysis means connected to said record means
23 for processing said statistical data from a plurality
24 of callers in combination to isolate a select subset of
25 said callers by interrelated processing; and
26 a qualification unit for controlling access
27 of callers to said analysis means in accordance with
28 the content of said record means.

1 26. A statistical analysis system for use
2 with a communication facility including remote terminal
3 apparatus for individual callers, wherein said remote
4 terminal apparatus may comprise a conventional tele-
5 phone instrument including voice communication means
6 and digital input means in the form of an array of
7 alphabetic numeric buttons for providing identification
8 and statistical data, said control system comprising:
9 interface structure coupled to said commu-
10 nication facility to interface said terminal apparatus
11 for voice and digital communication and including means
12 to provide signal values from signals representative of
13 data developed by said terminal apparatus;
14 voice generator means coupled through said
15 interface means for actuating said terminal apparatus
16 as to provide vocal operating instructions to an
17 individual caller;
18 a designation unit for developing designation
19 data signals as identification data and including an
20 encryptor; and

21 analysis means connected to said record means
22 for processing said statistical data from a plurality
23 of callers in combination to isolate a select subset of
24 said callers by interrelated processing.

1 27. A statistical analysis system for use
2 with a communication facility including remote terminal
3 apparatus for individual callers, wherein said remote
4 terminal apparatus may comprise a conventional tele-
5 phone instrument including voice communication means
6 and digital input means in the form of an array of
7 alphabetic numeric buttons for providing identification
8 and statistical data, said control system comprising:
9 interface structure coupled to said commu-
10 nication facility to interface said terminal apparatus
11 for voice and digital communication and including means
12 to provide signal values from signals representative of
13 data developed by said terminal apparatus;
14 voice generator means coupled through said
15 interface means for actuating said terminal apparatus
16 as to provide vocal operating instructions to an
17 individual caller; and
18 analysis means connected for processing data
19 from a plurality of callers in combination to isolate a
20 select subset of said callers by interrelated process-
21 ing including a random number generator for selecting
22 said subset.

1 28. A process for statistical analysis of
2 data for use with a communication facility including
3 remote terminal apparatus for individual callers,
4 wherein said remote terminal apparatus may comprise a
5 conventional telephone instrument including voice
6 communication means and digital input means in the form
7 of an array of alphabetic numeric buttons for providing

8 identification and statistical data, said process
9 including the steps of:
10 interfacing said communication facility to
11 provide voice signals and receive digital identifica-
12 tion and answer signals representative respectively of
13 identification data and answer data developed by said
14 terminal apparatus under control of said caller;
15 generating voice signals and supplying said
16 voice signals to actuate said terminal apparatus, as to
17 provide vocal operating instructions to a caller;
18 providing sequence signals representative of
19 sequence data indicating the time sequence of a call
20 with reference to the calls from other callers;
21 qualifying callers based on said digital
22 identification signals;
23 designating callers based on said digital
24 identification signals;
25 initiating files and storing data from
26 qualified callers including, (1) answer data for
27 specific callers as indicated by said answer signals,
28 (2) sequence data as indicated by said sequence signals
29 and (3) identification data as indicated by said
30 identification signals;
31 providing external data signals represen-
32 tative of external data distinct from said answer data
33 provided from said callers; and
34 comparing said answer data from said callers
35 and analyzing said answer data with said external data
36 in combination to isolate a select subset of said
37 callers.

TELEPHONIC-INTERFACE STATISTICAL ANALYSIS SYSTEM

Abstract of the Disclosure

A system D interfaces with a multiplicity of individual terminals T1-Tn of a telephone network facility C, at the terminals callers are prompted by voice-generated instructions to provide digital data that is identified for positive association with a caller and is stored for processing. The caller's identification data is confirmed using various techniques and callers may be ranked and accounted for on the basis of entitlement, sequence or demographics. Callers are assigned random designations that are stored along with statistical and identification data. A break-off control circuit may terminate the computer interface aborting to a terminal for direct communication with an operator. Real-time operation processing is an alternative to stored data. The accumulation of stored data (statistical, calling order sequence, etc.) is variously processed and correlated as with developed or established data to isolate a select group or subset of callers who can be readily identified and reliably confirmed. Different program formats variously control the processing of statistical data as for auction sales, contests, lotteries, polls, commercials and so on.

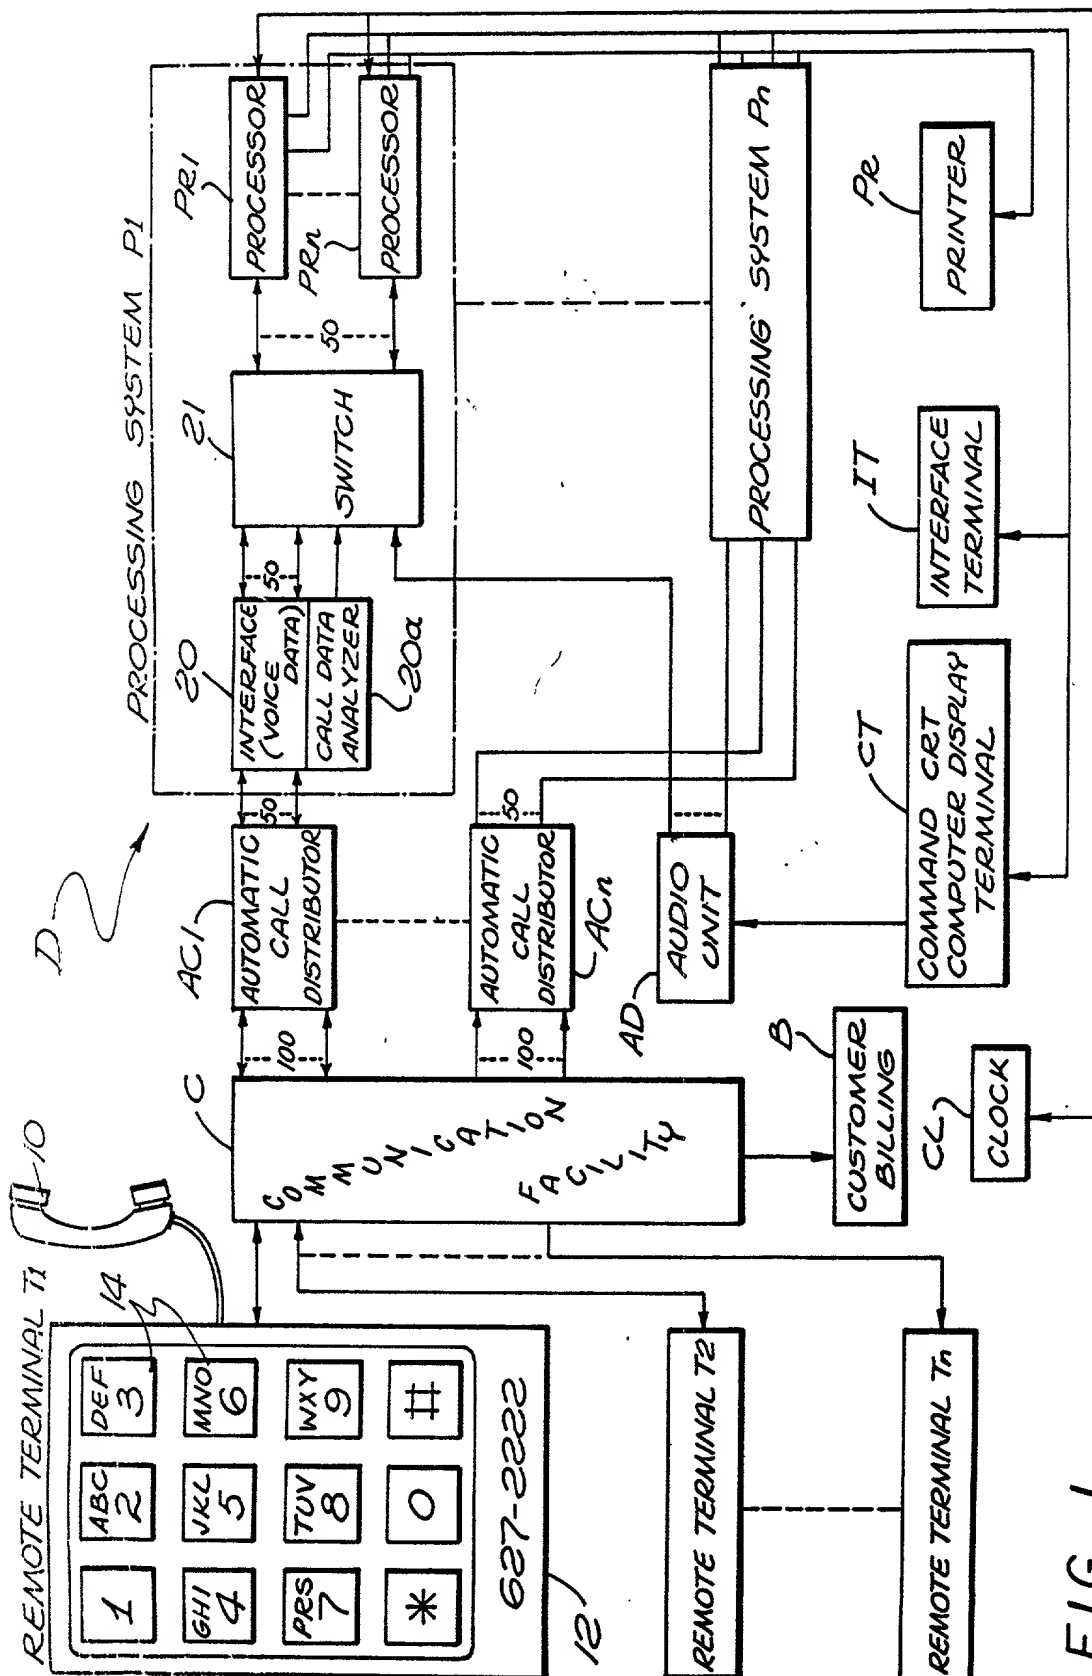


FIG. 1

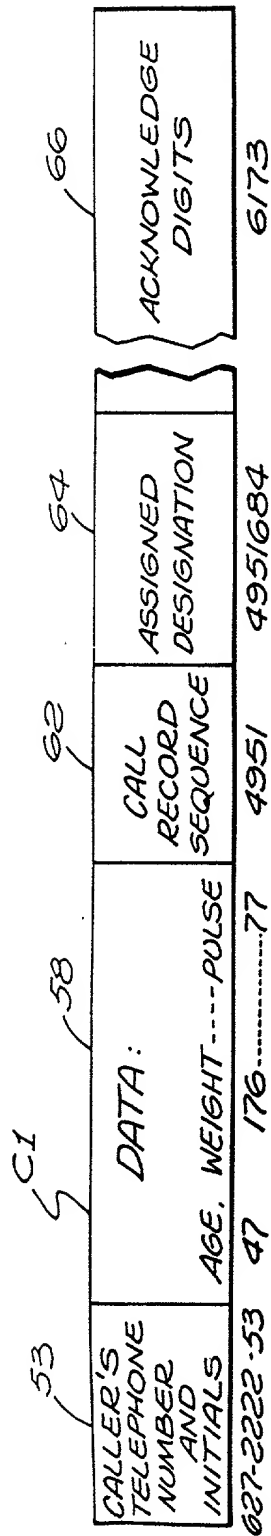


FIG. 2

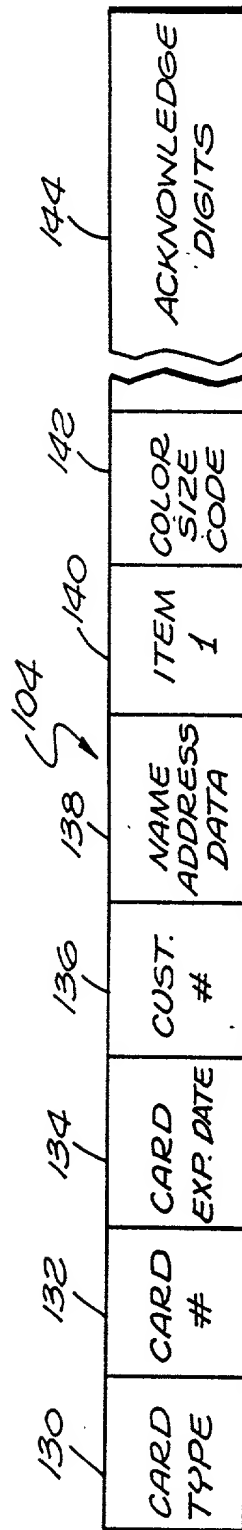


FIG. 5

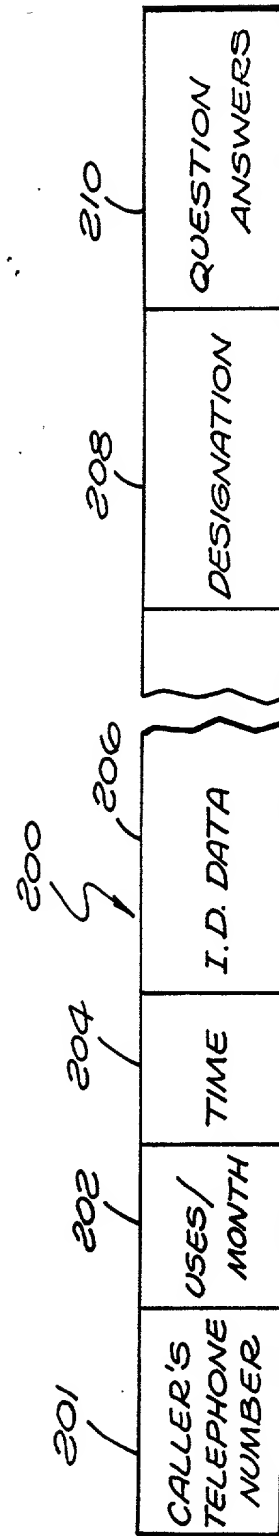


FIG. 7

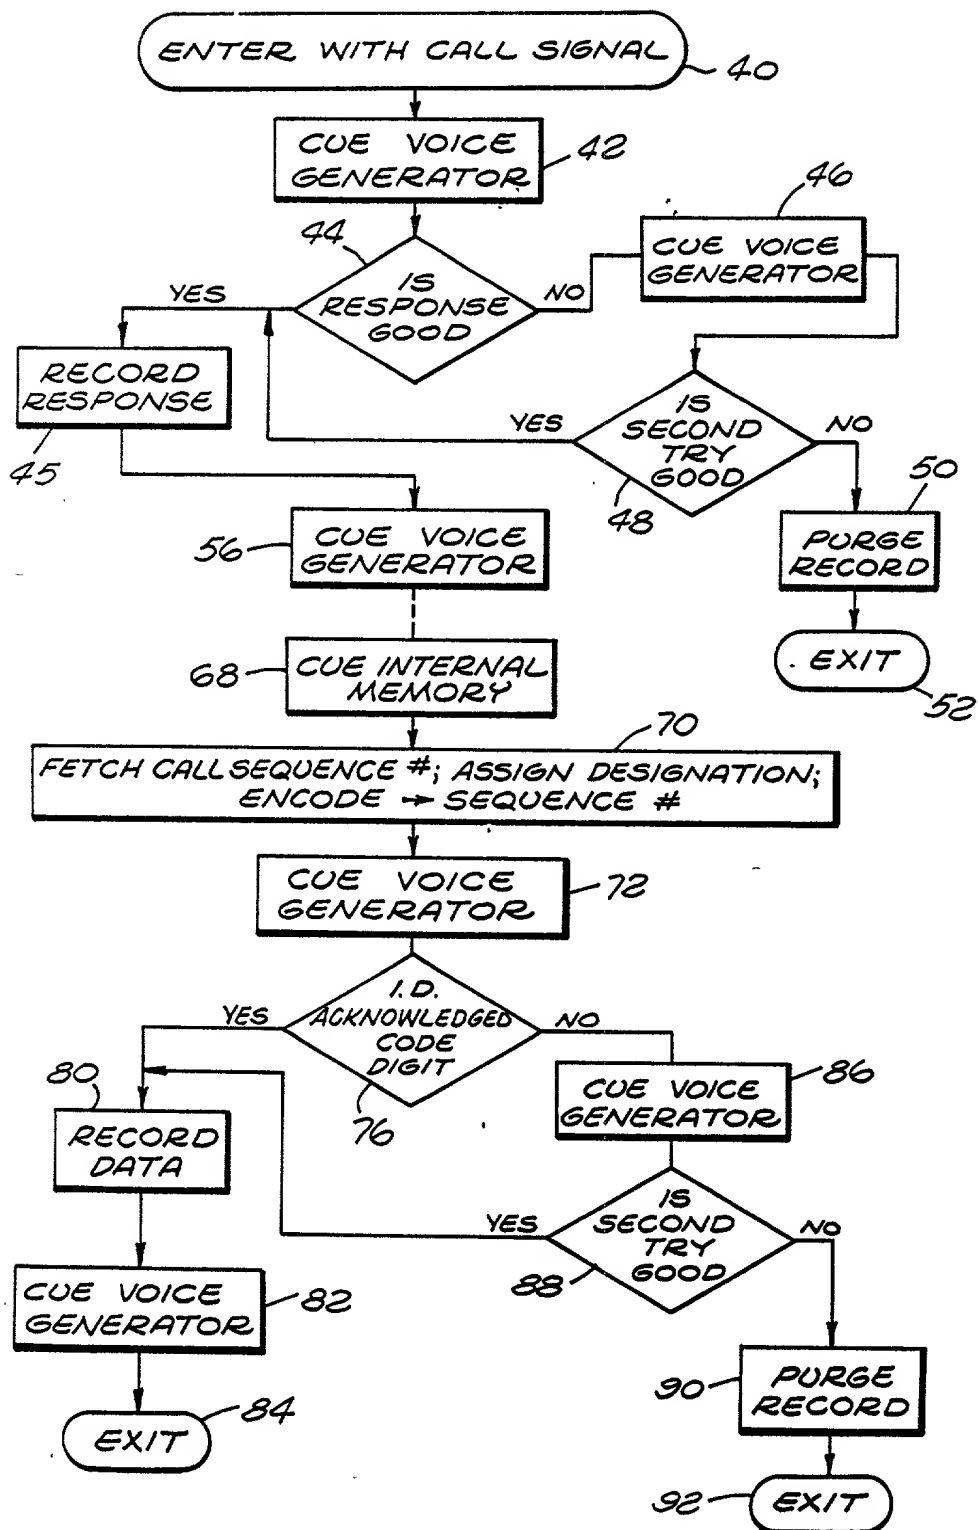


FIG. 3

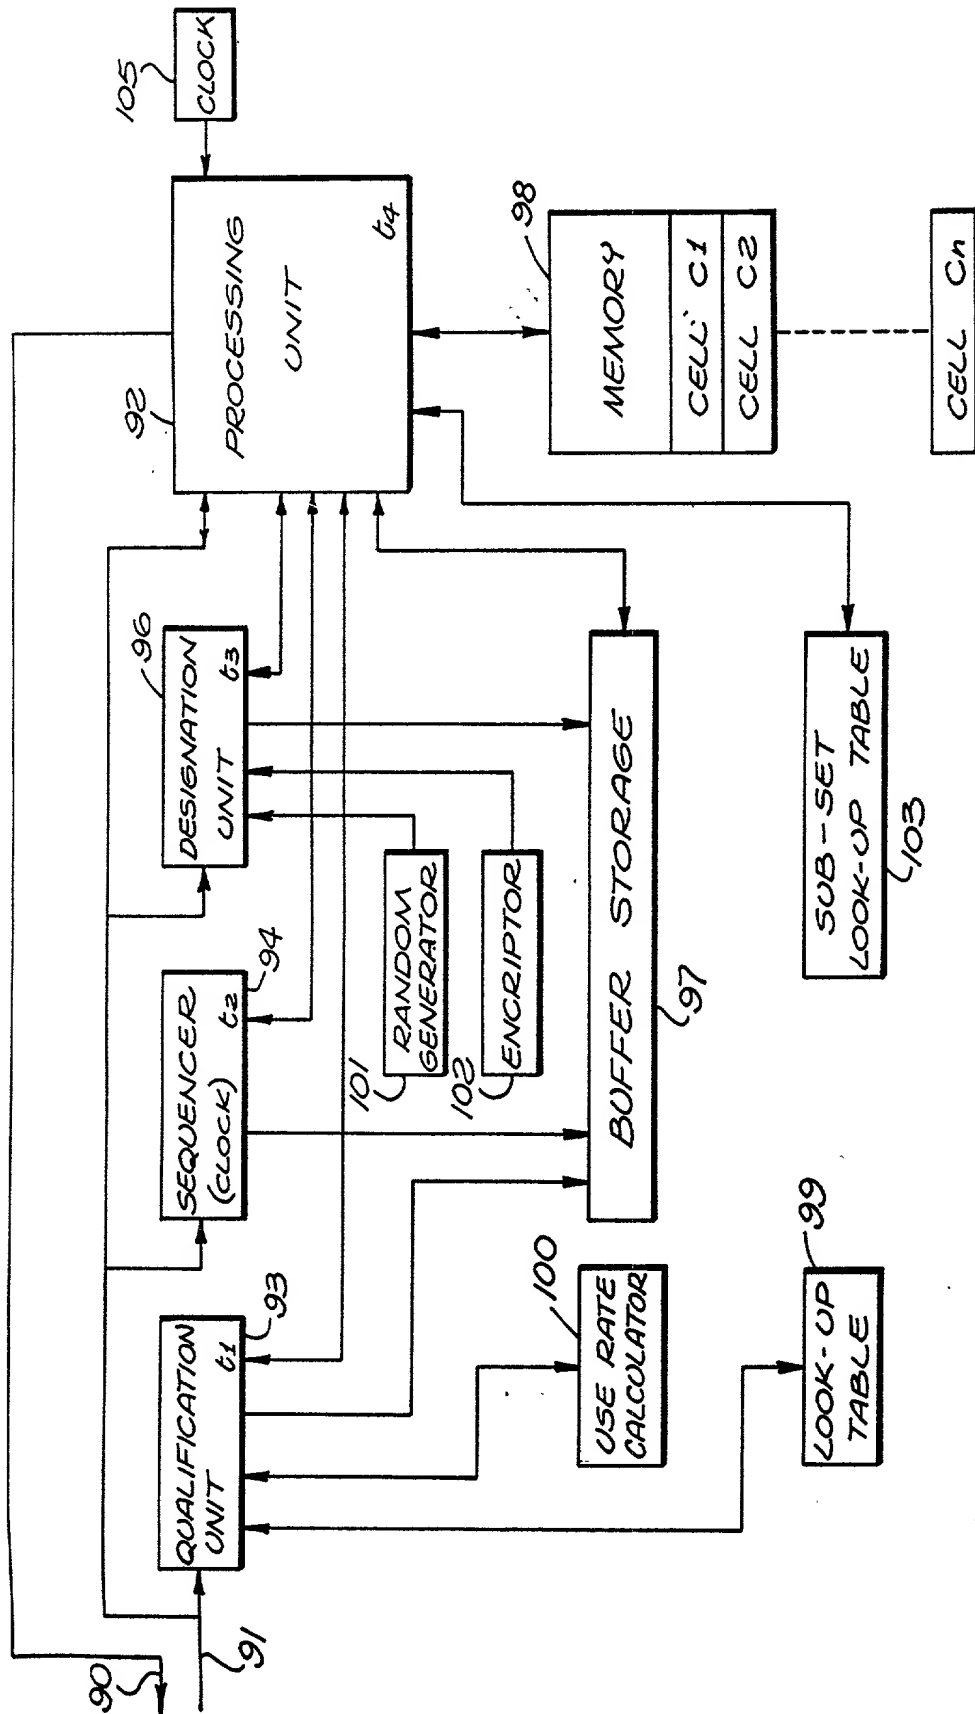


FIG. 4

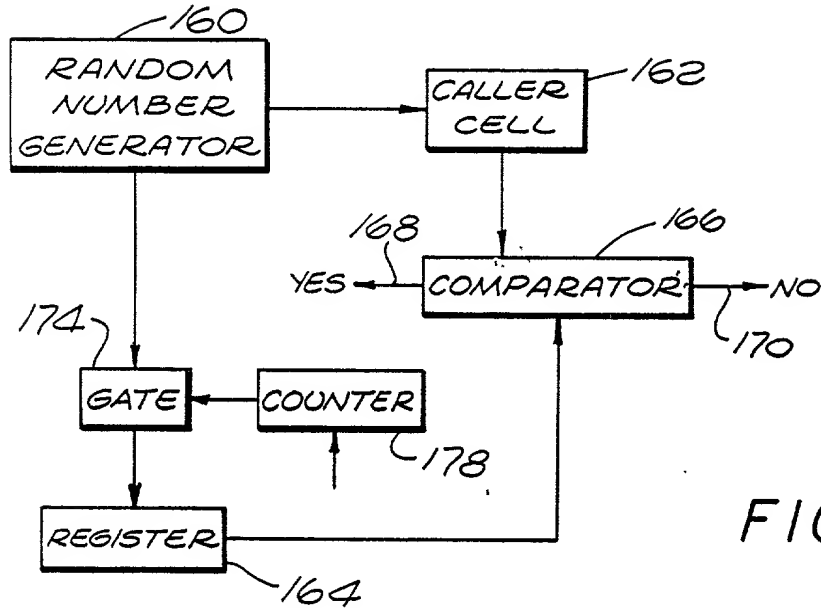


FIG. 6

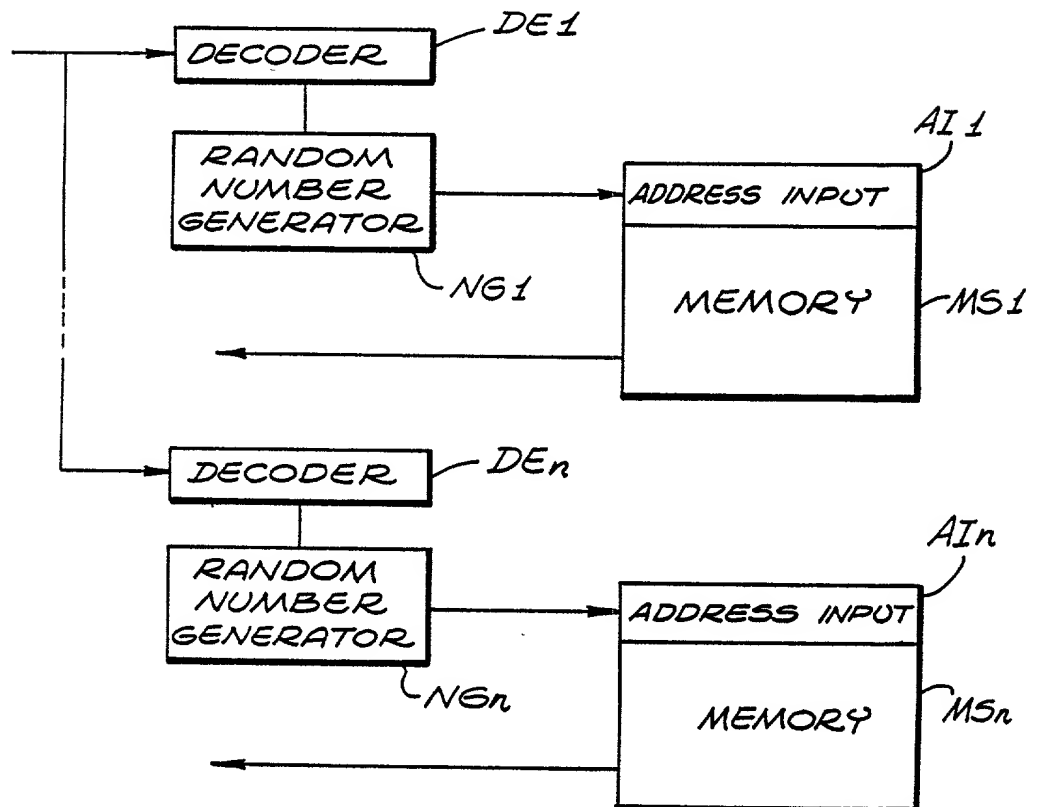


FIG. 8

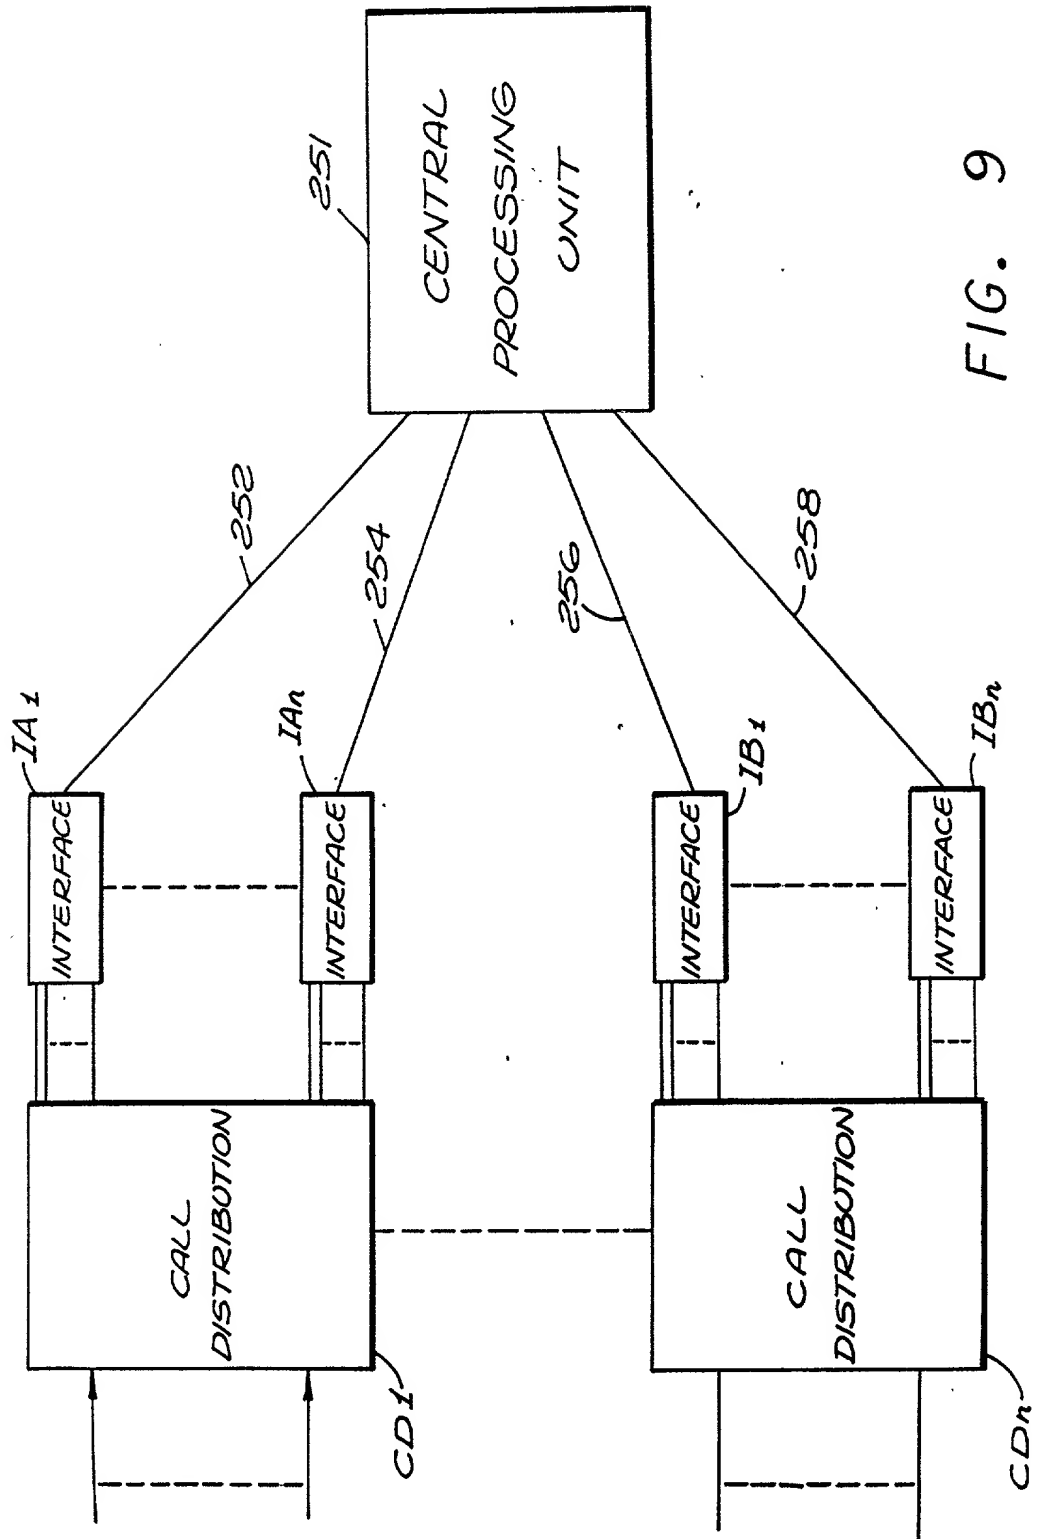


FIG. 9

Declaration, Power of Attorney, and Petition

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **TELEPHONIC-INTERFACE STATISTICAL ANALYSIS SYSTEM**.

(check one) ☒ is attached hereto. ☐ was filed on _____ the specification of which
Application Serial No. _____ and was amended on _____ as _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)**NONE**

(Number) _____	(Country) _____	Day month year filed _____
(Number) _____	(Country) _____	Day month year filed _____
(Number) _____	(Country) _____	Day month year filed _____

Priority claimed

<input type="checkbox"/> Yes	<input type="checkbox"/> No
<input type="checkbox"/> Yes	<input type="checkbox"/> No
<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

018,244	February 24, 1987	pending
(Application Serial No.)	(Filing date)	(Status) (patented, pending, abandoned)
753,299	July 10, 1985	abandoned
(Application Serial No.)	(Filing date)	(Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

And I hereby appoint

B. G. Nilsson (Reg. No. 17,350)
201 North Figueroa Street
Fifth Floor
Los Angeles, California 90012
(213) 977-1001

my attorney with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Wherefore I pray that Letters Patent be granted to me for the invention or discovery described and claimed in the foregoing specification and claims, and I hereby subscribe my name to the foregoing specification and claims, declaration, power of attorney, and this petition.

Full name of sole or first inventor Ronald A. Katz
Inventor's signature Ronald A. Katz Date 5/4/88
Residence Los Angeles, California
Citizenship U.S.A.
Post Office Address 570 South Mapleton Drive, Los Angeles, California 90024

Full name of second joint inventor, if any _____
Second Inventor's signature _____ Date _____
Residence _____
Citizenship _____
Post Office Address _____

(Supply similar information and signature for third and subsequent joint inventors.)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)	Group Art Unit: 2605
)	
Ronald A. Katz)	Examiner: S. Woo
)	
Serial No. 08/475,425)	
)	
Filed: June 7, 1995)	
)	
For: TELEPHONIC-INTERFACE STATISTICAL)	
ANALYSIS SYSTEM)	
)	
Dkt. No.: 228/022)	
(previous dkt. nos. 9002-1B670USD and 6646-101D3))	
)	

REVOCATION AND GRANT OF POWER OF ATTORNEY

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

All powers of attorney granted before are revoked.

I, Ronald A. Katz, am the president of A2D Corporation, a California corporation, which corporation is a general partner of A2D, L.P. a California limited partnership, which limited partnership is a general partner of RONALD A. KATZ TECHNOLOGY LICENSING, L.P., a California limited partnership, the assignee owning all of the interest in this application, and by virtue of the foregoing relationships I execute this document on its behalf to appoint as its attorneys and representatives, with full powers of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office

connected with it, David B. Murphy, Reg. No. 31,125, and Reena Kuyper, Reg. No. 33,830 (registered patent agent); and

Roland N. Smoot, Reg. No. 18,718; Conrad R. Solum, Jr., Reg. No. 20,467; James W. Geriak, Reg. No. 20,233; Robert M. Taylor, Jr., Reg. No. 19,848; Samuel B. Stone, Reg. No. 19,297; Douglas E. Olson, Reg. No. 22,798; Robert E. Lyon, Reg. No. 24,171; Robert C. Weiss, Reg. No. 24,939; Richard E. Lyon, Jr., Reg. No. 26,300; John D. McConaghy, Reg. No. 26,773; William C. Steffin, Reg. No. 26,811; Coe A. Bloomberg, Reg. No. 26,605; J. Donald McCarthy, Reg. No. 25,119; John M. Benassi, Reg. No. 27,483; James H. Shalek, Reg. No. 29,749; Allan W. Jansen, Reg. No. 29,395; Robert W. Dickerson, Reg. No. 29,914; Roy L. Anderson, Reg. No. 30,240; David Murphy, Reg. No. 31,125; James C. Brooks, Reg. No. 29,898; Jeffrey M. Olson, Reg. No. 30,790; Steven D. Hemminger, Reg. No. 30,755; Jerrold B. Reilly, Reg. No. 32,293; Paul H. Meier, Reg. No. 32,274; John A. Rafter, Jr., Reg. No. 31,653; Kenneth H. Ohriner, Reg. No. 31,646; Mary S. Consalvi, Reg. No. 32,212; Lois M. Kwasigroch, Reg. No. 35,579; Robert C. Laurenson, Reg. No. 34,206; Carol A. Schneider, Reg. No. 34,923; Hope E. Melville, Reg. No. 34,874; Michael J. Wise, Reg. No. 34,047; and Richard J. Warburg, Reg. No. 32,327;

all of LYON & LYON, First Interstate World Center, 633 West Fifth Street, Suite 4700, Los Angeles, California 90071-2066, telephone: (213) 489-1600.

The Assignment of this application to RONALD A. KATZ TECHNOLOGY LICENSING, L.P., was recorded on September 26, 1994, on Reel 7133, Frames 95-100.

Also, I have reviewed the assignment documents and hereby certify that, to the best of my knowledge and belief, title to the subject matter of this application is with

RONALD A. KATZ TECHNOLOGY LICENSING, L.P.

Date: 9/16/97 By: Ronald A. Katz

Ronald A. Katz
President
A2D Corporation

PATENTS

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Ronald A. Katz)
Serial No.: 07/335,923) Examiner: T. Brown
Filed: April 10, 1989) Art Unit: 2601
For: TELEPHONIC-INTERFACE)
STATISTICAL ANALYSIS SYSTEM)
New Docket No.: 6646-101N1)
(Previous Docket No.: 4646-101N))

POWER OF ATTORNEY BY ASSIGNEE

Commissioner of Patents
and Trademarks
Washington, D. C. 20231

Sir:

I, Ronald A. Katz, am the President of A2D Corporation, a California corporation, which corporation is a general partner of A2D, L.P., a California limited partnership, which limited partnership is a general partner of RONALD A. KATZ TECHNOLOGY LICENSING, L.P., a California limited partnership and assignee of the entire right, title and interest in the application for United States Letters Patent entitled TELEPHONIC-INTERFACE STATISTICAL ANALYSIS SYSTEM, and am authorized to sign on its behalf.

The Assignment of this application to RONALD A. KATZ TECHNOLOGY LICENSING, L.P., has been submitted to the Assignment Branch and was received on September 26, 1994.

I have reviewed the foregoing document and hereby certify that, to the best of my knowledge and belief, title to the

subject matter of this patent application is in RONALD A. KATZ
TECHNOLOGY LICENSING, L.P.

I hereby appoint: Byard G. Nilsson, Reg. No. 17,350, Harold
E. Wurst, Reg. No. 22,183, Robert A. Green, Reg. No. 28,301, Anne
Wang, Reg. No. 36,045, all members of the bar of one or more
states, Reena Kuyper, Patent Agent, Reg. No. 33,830, all of the
law firm of Nilsson, Wurst & Green, 707 Wilshire Blvd., 32nd
Floor, Los Angeles, California 90017; and Thomas J. Lannon,
Registration No. 18,417, 105 Whittier St., NW, Washington, DC
20012, to prosecute this application and to transact all business
in the United States Patent and Trademark Office in connection
therewith.

Please send all correspondence to:

NILSSON, WURST & GREEN
707 Wilshire Blvd., 32nd Floor
Los Angeles, California 90017
U.S.A.


Telephone (213) 243-8000

RONALD A. KATZ TECHNOLOGY
LICENSING, L.P., a California limited
partnership,

By: A2D, L.P., a California limited
partnership, its general partner

By: A2D Corporation, a California
corporation, its general partner

By:



Ronald A. Katz
President,
A2D Corporation

Attorney Docket No. 6646-101N1

6646-101N1.poa

POWER OF ATTORNEY

The undersigned, appointed principal attorney in the accompanying application of: Ronald A. Katz

for: TELEPHONIC-INTERFACE STATISTICAL ANALYSIS SYSTEM

executed on: May 4, 1988


hereby appoints:

<u>Attorney</u>	<u>Registration No.</u>
Billy A. Robbins	18,313
Lewis M. Dalgarn	20,415
Robert Berliner	20,121
M. John Carson	25,090
Harold E. Wurst	22,183
Michael S. Elkind	28,710
Gregory B. Wood	28,133
Robert A. Green	28,301
H. Adam Cochran	29,373
Michael A. Kondzella	18,013
Michael C. Schiffer	30,215
G. Keith deBrucky	29,145

all partners and associates of Nilsson, Robbins, Dalgarn, Berliner, Carson & Wurst, associate attorneys in said application, to prosecute this application, and to transact business in the Patent and Trademark Office connected with this application; and I hereby give Thomas J. Lannon, Registration No. 18,417, the power to inspect the application papers, to prosecute this application, and to transact business in the Patent and Trademark Office connected with this application.

Please address all correspondence to Nilsson, Robbins, Dalgarn, Berliner, Carson & Wurst, 201 North Figueroa Street, Los Angeles, California 90012.

Date: May 11, 1988



Byard G. Nilsson
Registration No. 17,350

Docket No.: 3194-102A2

(213) 977-1001